

High-resolution two-dimensional quantitative analysis of phosphorus, vanadium and arsenic, and qualitative analysis of sulphide, in a freshwater sediment.

Published in Environmental Chemistry 17th April 2008. vol. 5 (2), pages 143-149.

Access via the DOI: <http://dx.doi.org/10.1071/EN07096>

Or access directly from the publishers: <http://www.publish.csiro.au/?paper=EN07096>

Anthony Stockdale, William Davison* and Hao Zhang

Department of Environmental Science, Lancaster Environment Centre (LEC),
Lancaster University, Lancaster LA1 4YQ, United Kingdom

*Corresponding author: email: w.davison@lancaster.ac.uk; fax: +44 (0) 1524 593985

Environmental context

Chemical characterisation of sediment microniches can reveal diagenetic processes that may not be detected by larger-scale analysis. With the development of a new preparation method for a binding phase gel, the technique of diffusive gradients in thin-films has been used to demonstrate links between the diagenesis of sulphide, phosphorus, vanadium and arsenic at microniches. Knowledge of these processes may improve predictions of past deposition climates where trace elements are considered as paleoredox proxies.

Abstract

Recently introduced techniques that can provide two-dimensional images of solution concentrations in sediments for multiple analytes have revealed discrete sites of geochemical behaviour different from the average for that depth (microniches). We have developed a new preparation method for a binding phase, incorporated in a hydrogel, for the diffusive gradients in thin-films (DGT) technique. It allows co-analysis of sulphide and the reactive forms of phosphorus, vanadium and arsenic in the porewaters at the surface of the device. This gel, when dried and analysed using laser ablation mass spectrometry, allows the acquisition of high-resolution, sub-millimetre-scale, data. The binding phase was deployed within a DGT device in a sediment core collected from a productive lake, Esthwaite Water (UK). Localized removal from the porewaters of the sediment for phosphate and vanadium has been demonstrated at a microniche of local sulphide production. The possible removal processes, including bacterial uptake and reduction of vanadate to insoluble V^{III} by sulphide, are discussed. Understanding processes occurring at this scale may allow improved prediction of pollutant fate and better prediction of past climates where trace metals are used as paleoredox proxies.

Keywords: DGT, early diagenesis, laser ablation, microniche, phosphate.

Introduction

Recent developments in analytical techniques have enabled two-dimensional analysis in sediments of oxygen, pH, pCO₂, sulphide, Fe, Mn and trace metals.^[1-7] Several of these techniques have identified microniches, characterized by geochemical behaviour significantly different from the average for the given depth. These niches are generally attributed to elevated microbial activity at discrete sites with high concentrations of labile organic matter.^[8] If processes associated with microniches are demonstrated to be significant in terms of the accumulation of specific elements in sediments, some reassessment of our current understanding of 'bulk' sediment diagenesis may be required. Processes at microniches may affect: our understanding of pollutant fate, the interpretation of trace metal data for the prediction of past climates, or the prediction of reaction rates for redox processes. Sulphide, metal oxide and arsenic data can inform all of these subjects and phosphate may provide information relevant to the growth stage of the microniche bacteria.

Vanadium is likely to be in the measurable form H₂VO₄⁻ in the pH range 5-9 and the E_H (redox potential) range 0-1 volts.^[9] Reduction of V^V to V^{IV} can occur with organic materials as electron donors,^[10, 11] with reduction to V^{III} requiring a stronger reductant. V^{III} is rapidly hydrolysed in aqueous solution, resulting in the precipitation of relatively insoluble V^{III} oxyhydroxides.^[9] Sulphide can reduce V^{IV} to V^{III}, but when studied under laboratory conditions the reaction was slow at natural sulphide concentrations.^[9] However, the authors considered that effects such as surface catalysis may increase reaction rates under natural conditions.

Removal of As from anoxic porewaters, observed by Huerta-Diaz et al,^[12] was attributed to co-precipitation with FeS and/or adsorption on FeS. Microniches may have implications for As and anionic metal oxides such as vanadate, molybdate, or perhenate, which are known to have a tendency to accumulate in strongly reducing sediments.^[13-16] Diffusion of these oxyanions into sulphidic microniches within the oxic, suboxic and weakly reducing zones may enable fixation where no net removal is predicted. Provided these reactions are not fully reversible, these discrete environments may account for a significant part of their bulk sediment accumulation. Phosphate release from organic matter (OM) degradation occurring in microniches may be overcompensated by uptake from OM reducing microorganisms that are in the exponential growth phase. Tezuka's^[17] observation of no phosphate regeneration at low substrate nitrogen (C:N of 60:1) was attributed to the capacity of bacteria to store excess P within their cells.

It has been recognised that a lack of congruent analysis makes it difficult to cross interpret data obtained from different probes.^[8] Data obtained simultaneously from the same probe can be easier to interpret, as assumptions about the deployment conditions and nature of microniches do not have to be made. Here we describe a new method for the preparation of a binding phase gel for diffusive gradients in thin-films (DGT) based on iron oxide, which is suitable for the binding of soluble reactive species of phosphorus, vanadium and arsenic. This gel is combined with a previously described sulphide binding phase of silver iodide to provide visual identification of sulphidic microniches. Analysis of the combined gel using laser ablation inductively coupled plasma mass spectrometry (LA-ICP-MS) gives two-dimensional data at high-resolution (sub-mm). We detail the principles of DGT, preparation of the combined

phase gel, deployment procedure, LA-ICP-MS procedure, and results obtained from analysis of a sulphidic microniche.

Principles of DGT

Immobilisation of analytes diffusing through a filter membrane and a diffusive gel from the porewater to the binding layer, results in a concentration gradient through the diffusive layers. The concentration of solute accumulated in the binding gel (M) per unit area (A , cm^2), divided by the deployment time (t , s), gives the time averaged solute flux (F) through the diffusive layers (typical units $\text{mol cm}^{-2} \text{s}^{-1}$, Eq. 1)

$$F = M / At \quad (1)$$

DGT utilises Fick's law of diffusion to determine the average concentration at the DGT interface (C_{DGT}) from the mass of analyte on the binding layer (Eq. 2).

$$F = D_d C_{DGT} / \Delta g \quad (2)$$

Where Δg is the diffusive layer thickness and D_d is the diffusion coefficient in the gel.

Combining Equations 1 and 2 allows calculation of C_{DGT} (Eq. 3).^[18]

$$C_{DGT} = \frac{M \Delta g}{D_d A t} \quad (3)$$

In sediments, C_{DGT} is the average concentration at the surface of the DGT device during the deployment. It is only the same as undisturbed porewater concentrations when resupply from the solid phase is sufficient to prevent their depletion. In most cases resupply will be insufficient for full buffering and partial resupply will be controlled by the desorption kinetics (characteristic response time^[19, 20]) and partition coefficients of the analyte. Various cases of resupply are considered by Zhang et al.^[21] Where a solute is being locally generated within the sediment at rates higher than the average for that depth, there will be local elevation in the porewater concentration.

The elevated concentration and comparatively high rate of resupply will contribute to a higher DGT signal.^[22] DGT-observed elevations in concentration can therefore be indicative of localised release processes and conversely, observed minima in concentrations may be indicative of other processes such as scavenging.

Materials and methods

Preparation of diffusive gel

0.4 mm thick diffusive gels were prepared using established procedures,^[23] from gel solution prepared from the following reagents, 37.5% acrylamide solution (40% w/w, BDH, Electran), 47.5% 18.2M Ω -cm Milli-Q (MQ) water and 15% DGT cross-linker (2% w/w, DGT Research Ltd.). Chemical polymerization was initiated by ammonium persulphate (10% w/w; APS, BDH Electran) and catalysed by TEMED (99%, N, N, N, N-tetramethyl-ethylenediamine, BDH Electran).

Preparation of the combined silver iodide-iron oxide binding layer

Preparing the AgI phase

A homogeneous gel, where AgI is precipitated into a pre-cast gel, first suggested by Teasdale et al^[24] was reported by Devries and Wang.^[4] The method presented in this work is a modification of the Devries and Wang procedure using the gel solution described above.^[25] 0.153 g of silver nitrate (BDH, AnalaR) was dissolved in 0.45 ml of MQ water. 8.55 ml of gel solution and 36 μ l of 5% w/w APS were added to the dissolved AgNO₃ and well mixed between each addition (TEMED catalyst was not required). Following addition of the last solution, the gels are cast immediately between glass plates spaced by a 0.25 mm plastic spacer, resulting in a 0.4 mm thick gel after hydration. Once cast the gels are allowed to polymerise at room temperature

(20±2 °C) in dark conditions for approximately 1 hour. Following polymerisation, the glass plates are opened so that the gel remains adhered to one plate. The plate and gel are then immersed in a solution of ~0.2 M potassium iodide (16.6 g in 500 ml, Acros Organics, ACS reagent grade). The gel becomes white within a few minutes and is peeled off from the glass plate (this procedure ensures the precipitate in the gel is distributed evenly). Gels are then kept in the KI solution overnight to allow full development, before being rinsed several times in MQ water to remove excess reagents.

Addition of the iron oxide phase

An iron oxide gel, prepared using ferrihydrite slurry as the binding agent, was first reported by Zhang et al^[18] for the measurement of dissolved phosphorus. Inevitable heterogeneity in the particle size and distribution makes this gel unsuitable for high-resolution analysis. The method presented here provides a homogeneous gel by precipitating ferrihydrite directly in the gel. Four grams of ferric nitrate ($\text{Fe}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$; BDH, AnalaR) were dissolved into approximately 40 ml of MQ water. Three AgI gel sheets were placed into the solution and the volume made up to 100 ml. The gels were allowed to equilibrate for a minimum of two hours. Following equilibration the gels were rinsed for a few seconds in MQ water before being introduced, one by one, into a 0.05 M solution of sodium bicarbonate (BDH, AnalaR) that was previously adjusted to pH 6-7 by addition of ~1 ml of nitric acid (70%, BDH, AristaR). Gels give the appearance of total precipitation of orange-brown ferrihydrite within 5 min, but are left in the solution for ~30 min to ensure complete development. Prepared gels were rinsed several times in MQ water to remove excess reagents.

The presence of carbonate in the ferrihydrite binding layer from the buffer solution may lead to an increase in the rate of conversion of ferrihydrite to goethite.^[26] As this may change the binding properties of the gel, it is recommended that the ferrihydrite phase be freshly prepared before deployment. Should the sulphide scans not be required, the AgI gel can be replaced with a DGT diffusive gel to give a binding layer containing only ferrihydrite.

Calibration procedure

Discs of binding phase gel (4.9 cm²) were exposed to known molar amounts of solutions of phosphate, vanadate and arsenate (thus giving known molar amounts bound per cm²). Standards were prepared from the salts, sodium hydrogenarsenate heptahydrate (Sigma, 98%), sodium orthovanadate (Aldrich, 99.8%) and di-sodium hydrogen orthophosphate dodecahydrate (BDH, GPR). Discs were placed into vials containing 14 ml of each standard solution and shaken in an end-over-end stirrer for 72 hours. No analytes were detectable in the solutions after this time, indicating complete uptake by the gels. Following exposure, gels were placed onto a polysulphonate filter and dried for laser analysis.

Deployment procedure

DGT sediment probes (DGT Research Ltd.) were used to contain the gel layers. The binding layer was placed onto a polysulphonate backing filter (0.45 µm pore size; Pall Corporation) to aid removal of this layer from the probe assembly after deployment. The filter also supports the dimensional integrity of the binding phase during handling and drying. The binding layer is positioned in the probe housing, and then overlaid by the diffusive gel and a filter, which prevents fouling of the diffusive gel. All layers are

held within the plastic housing by means of a close fitting plastic window. The exposed area of the probe is 150×18 mm. Prior to deployment all probes were deoxygenated for 24 hours by submerging in a 0.01 M sodium chloride solution (BDH, AnalaR) through which oxygen free nitrogen gas was continuously bubbled.

Sediment probes were deployed in sediment from Esthwaite Water (UK), a small, productive, softwater lake, which is seasonally anoxic and has a sediment whose porewater chemistry is dominated by iron and manganese.^[27] Intact cores of the sediment and overlying water were collected in May 2007 from the deepest basin using a Jenkin corer. Oxygen was present in the overlying water and it was maintained during the experiment by bubbling with air. Probes were deployed for a period of six days ($T = 20 \pm 2$ °C). After deployment, the gels were cut from the probe window with a Teflon coated razor blade. The binding phase was placed between clean plastic sheets and refrigerated before being dried. The drying procedure is provided as Accessory Materials.

Laser ablation procedure

Laser ablation (LA) was undertaken using a New Wave UP-213 coupled to a Thermo Electron X Series inductively coupled plasma mass spectrometer (ICP-MS). A beam diameter of 100 μm was selected to achieve the maximum analyte signal. Ablation intensity was set at 43% with a firing time of four seconds and an inter-sample dwell time of 10 s. These parameters were chosen to ensure peaks were easily defined from the background by the instrument software. The distance between ablation spots was 333 μm . The procedure for extracting the transient peaks from the time series of

counts followed the method described by Warnken et al^[5] (the exact procedure is provided as Accessory Materials).

Obtaining qualitative sulphide data

Qualitative sulphide data from the deployed gels was obtained by computer imaging densitometry (CID). Gels were scanned, after ablation, using a flatbed scanner (Hewlett Packard ScanJet 2100C). Files were saved as greyscale tagged image file format (.tif) to enable conversion of the images to background corrected text files using Scion Image, image-processing software (Scion Corp., freeware available from <http://www.scioncorp.com>, accessed March 2007). Data were then plotted as colourmaps using Matlab. Scanning of the gels after laser ablation allows the ablation grid to be mutually visualized with sulphide and avoids potential contamination of gel handling before laser analysis. Future work should include the quantification of the sulphide data. CID is not a suitable technique for sulphide calibration as the ferrihydrite contributes to a high background greyscale value. Optimisation of laser ablation techniques to include S will be required.

Results and discussion

Analytical performance

Figure 1 shows the time series of counts for the analytes and internal standard for the gel used for the 0.14 nmol cm⁻² calibration for As and V (1.4 nmol cm⁻² for P). Good analytical precision was achieved for all analytes and the internal standard (residual standard deviation (RSD) <10%). ⁵⁷Fe was chosen as the internal standard for this work as its mass is closer to those of the analytes than ¹³C (used previously for cationic metals in gels).^[5] Furthermore, the peak count to background ratio for Fe was

significantly higher than for C. Internal standardisation was performed on a line-by-line basis, with each data point adjusted according to the average of the internal standard for the line. All data were then standardized against the average peak areas of the standard gels. Analytical precision tended to improve with internal standardisation. The RSD decreased by 0 to 7.6% in eleven cases and increased by 1% and 2.1% in 2 cases. As analysis of the blank did not produce resolvable analyte peaks, method detection limits (MDL) were determined using three times the standard deviation of the lowest concentration standard. Time averaged detectable C_{DGT} concentrations for a deployment of six days were 9.8, 0.16, and 0.39 nM for P, V and As respectively. This corresponds to a MDL per ablation spot of 39, 0.65 and 1.6 fmol for P, V and As respectively. Calibrations were linear for all analytes ($r^2 > 0.995$, $n = 4$ for V and As, $n = 8$ for P).

In situ profiles

Deployed gels were analysed in a 1.2×0.25 cm area around a sulphidic microniche located approximately 11 cm below the sediment water interface. The ablation grid spacing was 333 μm , giving 280 data points for the gridded area (Figure 2). The 2D images of concentration and 1D concentration-depth profiles (obtained by averaging data at 1 mm vertical intervals) show elevated sulphide directly associated with depleted P and V. Arsenic shows no clear depletion in the 2D image, but the concentrations in the vertical profile are generally lower in the vicinity of the microniche.

Sulphidic microniches previously observed by DGT techniques have been attributed to sulphate reducing bacteria at discrete sites of OM that can be utilised by these

bacteria.^[4] Several studies^[17, 28-30] have revealed that bacterial decomposition of OM can reduce ambient P levels due to enhanced uptake during the bacterial growth phase. There is no net release of P until death of the bacteria. Our observed depletion of P at the sulphidic microniche (Figure 2) is consistent with active decomposition of OM. This is supported by a good inverse correlation between the mm-averaged greyscale values (sulphide) and P (Table 1). Although a pH decrease at microniches of decomposing OM have been observed,^[31] this should have little impact on the adsorption capacity of the binding phase, as lowering the pH will alter the ambient conditions further away from the point of zero charge of ferrihydrite. Zhang et al^[18] found no change in the P adsorption behaviour of ferrihydrite slurry gel over a pH range of 2-10.

The potential of V to accumulate or be retained by sediments under strongly reducing conditions has been recognised.^[10, 15] V is also known to be incorporated into enzymes of nitrogen fixing bacteria.^[32, 33] Bacterial cultures isolated from crude oil contaminated land have been shown to bioaccumulate vanadium from agar medium at high V concentration.^[34] Microorganisms capable of reducing vanadium have been isolated and the possibility of microbial reduction causing precipitation of V in anoxic environments has been recognised.^[35] Several studies have suggested V concentrations are reduced by phytoplankton uptake or biogenic adsorption in surface layers of oceans^[36,37] or lakes.^[38] Observations of depletions of V in oxic waters of the Mississippi River Delta were initially attributed to these processes.^[39] However, a more recent study suggests that mixing of surface waters with V depleted bottom waters may explain depletions in overlying water.^[40] Comparison of the mm-averaged data (Figure 2) for V and P gives an indication that the data are closely correlated

(Table 1). Given this close correlation and evidence for both the microbial uptake of phosphate and vanadium's microbial role, it is more likely that the vanadium observations at the microniche are due to microbial activity. However, without evidence for the utilisation of V by sulphate reducers, V profiles in Figure 2 could be attributed to sulphide reduction and subsequent scavenging or by a combination of these processes and biological utilisation.

Strains of bacteria capable of reducing arsenate and sulphate concomitantly have been isolated. Arsenate can also be bacterially or inorganically reduced to arsenite, which has similar retention properties on iron oxide as arsenate. Arsenite can subsequently react with sulphide to produce thioarsenite. Thioarsenite can, in turn, co-precipitate with iron sulphide or precipitate as arsenic sulphides (Nicholas et al, and references therein^[41]). Fox and Doner^[15] concluded that As can be accumulated or retained in sediments under strongly reducing conditions, but in moderately reducing conditions mobilisation may occur. The mm-averaged data suggest that there may be some link between the elevated microbial activity (and thus sulphide) at the microniche and the depleted As concentrations. However, due to the lack of a direct association between sulphide and As in the 2D data, there is no clear evidence for the processes described.

Much is known about molybdenum geochemistry and it can provide an example of why microniche geochemistry may be important in the diagenesis of some elements. Molybdate (MoO_4^{2-}) can be reduced by sulphide in a stepwise manner to form intermediate oxythiomolybdates ($\text{MoO}_3\text{S}^{2-}$, $\text{MoO}_2\text{S}_2^{2-}$, MoOS_3^{2-}) on the reaction pathway towards the formation of tetrathiomolybdate (MoS_4^{2-}).^[42] It has also been proposed that this sulphidation does not follow first order kinetics and that a three fold

increase in $\Sigma\text{H}_2\text{S}$ concentration may result in a 100 fold change in reaction rates.^[42] Furthermore, the sulphidic forms have been shown to be more susceptible to scavenging.^[43] Recently, evidence for the analogous intermediates of (oxy)thioarsenates ($\text{AsO}_x\text{S}_{3-x}^{3-}$, $x = 0 - 3$) has been presented.^[44] Should the rate and scavenging behaviour be analogous to that observed for molybdenum, arsenic transformations at sulphidic microniches may be significant, compared to the average for that depth. Helz et al^[43] have raised the possibility that Mo fixation within highly sulphidic microenvironments (such as those observed by Widerlund and Davison^[25] and Motelica-Heino et al^[45]) may be misinterpreted as fixation at low sulphide concentrations within the bulk sediment. This may also apply to As and anionic metal oxides.

Processes occurring in microniches may have wider implications in understanding pollutant fate and the use of trace elements in providing paleoredox information. If the depleted V concentration is caused by bacterial uptake, death of the bacteria may release the V, with no net accumulation over the duration of the bacterial lifecycle. However, if sulphide reduction and subsequent scavenging is the sole process responsible for the depleted concentration, microniches, if significantly distributed, may provide an additional sink for V. In using trace elements, including vanadium, as paleoredox proxies^[46] in predictions of past deposition climates, it may be necessary to consider sediment microniche processes. Bioturbation, with associated microniches, will be expected in all but pristine (i.e. no or low OM input) or euxinic environments. Fixation at microniches could be misinterpreted as fixation within ambient anoxic or suboxic sediment. This highlights the importance of using multiple indicators when predicting past deposition climates.

Conclusions

This work reports the development and deployment of a combined phase AgI-ferrihydrite DGT gel and demonstrates the effectiveness of the method in yielding new geochemical information about sediment microniches. Phosphate uptake associated with elevated activity of sulphate reducing bacteria has been demonstrated. Unequivocal interpretation of the vanadium and arsenic data is more difficult, as the literature indicates that more than one mechanism may be possible. Further work is required to determine if bacterial uptake, use by bacteria as an electron acceptor, reduction by sulphide and subsequent scavenging, or other processes are responsible for the observed depletions associated with sulphide production.

Acknowledgments

We thank Kent Warnken for providing expertise with the laser ablation set-up and use of the time resolved analysis data processing application in PlasmaLab, and Debbie Hurst for assistance with sample collection. A. Stockdale is supported by funding from the UK Natural Environment Research Council (NER/S/A/2005/13679).

Accessory materials

Details of drying procedure and settings for the TRA software. This material is available free of charge via the Internet at <http://www.publish.csiro.au>.

References

- [1] R.N. Glud, N.B. Ramsing, J.K. Gundersen, I. Klimant, Planar optodes: A new tool for fine scale measurements of two-dimensional O₂ distribution in benthic communities, *Mar. Ecol.: Prog. Ser.*, **1996**, *140*, 217-226.
- [2] S. Hulth, R.C. Aller, P. Engstrom, E. Selander, A pH plate fluorosensor (optode) for early diagenetic studies of marine sediments, *Limnol. Oceanogr.*, **2002**, *47*, 212-220.
- [3] Q.Z. Zhu, R.C. Aller, Y.Z. Fan, A new ratiometric, planar fluorosensor for measuring high resolution, two-dimensional pCO₂ distributions in marine sediments, *Mar. Chem.*, **2006**, *101*, 40-53.
- [4] C.R. Devries, F.Y. Wang, In situ two-dimensional high-resolution profiling of sulfide in sediment interstitial waters, *Environ. Sci. Technol.*, **2003**, *37*, 792-797.
- [5] K.W. Warnken, H. Zhang, W. Davison, Performance characteristics of suspended particulate reagent-iminodiacetate as a binding agent for diffusive gradients in thin films, *Anal. Chim. Acta*, **2004**, *508*, 41-51.
- [6] D. Jézéquel, R. Brayner, E. Metzger, E. Viollier, F. Prévot, F. Fiévet, Two-dimensional determination of dissolved iron and sulfur species in marine sediment pore-waters by thin-film based imaging. Thau lagoon (France), *Estuarine Coastal Shelf Sci.*, **2007**, *72*, 420-431.
- [7] S.M. Shuttleworth, W. Davison, J. Hamilton-Taylor, Two-dimensional and fine structure in the concentrations of iron and manganese in sediment pore-waters, *Environ. Sci. Technol.*, **1999**, *33*, 4169-4175.

- [8] A. Stockdale, W. Davison, H. Zhang, Experimental evidence for micro-scale biogeochemical heterogeneity in sediments: A review. *Earth-Sci. Rev.*, In Press.
- [9] R.B. Wanty, M.B. Goldhaber, Thermodynamics and kinetics of reactions involving vanadium in natural systems: Accumulation of vanadium in sedimentary rocks, *Geochim. Cosmochim. Acta*, **1992**, *56*, 1471-1483.
- [10] C. Bloomfield, W.I. Kelso, The mobilization and fixation of molybdenum, vanadium and uranium by decomposing organic matter, *J. Soil Sci.*, **1973**, *24*, 368-379.
- [11] R.K. Skogerboe, S.A. Wilson, Reduction of ionic species by fulvic acid, *Anal. Chem.*, **1981**, *53*, 228-232.
- [12] M.A. Huerta-Diaz, A. Tessier, R. Carignan, Geochemistry of trace metals associated with reduced sulfur in freshwater sediments, *Appl. Geochem.*, **1998**, *13*, 213-233.
- [13] T.J. Shaw, J.M. Gieskes, R.A. Jahnke, Early diagenesis in differing depositional-environments - the response of transition-metals in pore water, *Geochim. Cosmochim. Acta*, **1990**, *54*, 1233-1246.
- [14] J. Crusius, S. Calvert, T. Pedersen, D. Sage, Rhenium and molybdenum enrichments in sediments as indicators of oxic, suboxic and sulfidic conditions of deposition, *Earth Planet. Sci. Lett.*, **1996**, *145*, 65-78.
- [15] P.M. Fox, H.E. Doner, Accumulation, release, and solubility of arsenic, molybdenum and vanadium in wetland sediments, *J. Environ. Qual.*, **2003**, *32*, 2428-2435.

- [16] J.L. Morford, S.R. Emerson, E.J. Breckel, S.H. Kim, Diagenesis of oxyanions (V, U, Re and Mo) in pore waters and sediments from a continental margin, *Geochim. Cosmochim. Acta*, **2005**, *69*, 5021-5032.
- [17] Y. Tezuka, Bacterial regeneration of ammonium and phosphate as affected by the carbon : nitrogen : phosphorus ratio of organic substrates, *Microb. Ecol.*, **1990**, *19*, 227-238.
- [18] H. Zhang, W. Davison, R. Gadi, T. Kobayashi, In situ measurements of dissolved phosphorus in natural waters using DGT, *Anal. Chim. Acta*, **1998**, *370*, 29-38.
- [19] A.C. Lasaga, The kinetic treatment of geochemical cycles, *Geochim. Cosmochim. Acta*, **1980**, *44*, 815-828.
- [20] B.D. Honeyman, P.H. Santschi, Metals in aquatic systems, *Environ. Sci. Technol.*, **1988**, *22*, 862-871.
- [21] H. Zhang, W. Davison, R.J.G. Mortimer, M.D. Krom, P.J. Hayes, I.M. Davies, Localised remobilization of metals in a marine sediment, *Sci. Tot. Environ.*, **2002**, *296*, 175-187.
- [22] C. Naylor, W. Davison, M. Motelica-Heino, G.A. van den Berg, L.M. van der Heijdt, Simultaneous release of sulphide with Fe, Mn, Ni and Zn in marine harbour sediments measured using a combined metal/sulphide DGT probe, *Sci. Tot. Environ.*, **2004**, *328*, 275-286.
- [23] W. Davison, G. Fones, M. Harper, P. Teasdale, H. Zhang, Dialysis, DET and DGT: in situ diffusional techniques for studying water, sediment and soils. In Buffle, J., Horvai, G., (Eds.), *In Situ Monitoring of Aquatic Systems: Chemical Analysis and Speciation*, John Wiley and Sons, Chichester, **2000**, pp. 495-570.

- [24] P.R. Teasdale, S. Hayward, W. Davison, In situ, high-resolution measurement of dissolved sulfide using diffusive gradients in thin films with computer-imaging densitometry, *Anal. Chem.*, **1999**, 71, 2186-2191.
- [25] A. Widerlund, W. Davison, Size and density distribution of sulfide-producing microniches in lake sediments, *Environ. Sci. Technol.*, **2007**, 41, 8044-8049.
- [26] U. Schwertmann, R.M. Cornell, *Iron Oxides in the Laboratory, Preparation and Characterization, Second Edition*. Wiley-VCH, Weinheim, **2000**, pp 188.
- [27] W. Davison, Iron and manganese in lakes, *Earth Sci. Rev.*, **1993**, 34, 119-163.
- [28] U. Uehlinger, Bacteria and phosphorus regeneration in lakes. An experimental study, *Hydrobiologia*, **1986**, 135, 197-206.
- [29] R. Garcia-Ruiz, J. Lucena, F.X. Neill, Do bacteria regenerate phosphorus while decomposing seston? *Mar. Freshwater Res.*, **1999**, 50, 459-466.
- [30] D.O. Hessen, G.I. Agren, T.R. Anderson, J.J. Elser, P.C. de Reiter, Carbon sequestration in ecosystems: the role of stoichiometry, *Ecology*, **2004**, 85, 1179-1192.
- [31] Q.Z. Zhu, R.C. Aller, Y.Z. Fan, Two-dimensional pH distributions and dynamics in bioturbated marine sediments. *Geochim. Cosmochim. Acta*, **2006**, 70, 4933-4949.
- [32] R.L. Robson, R.R. Eady, T.H. Richardson, R.W. Miller, M Hawkins, J.R. Postgate, The alternative nitrogenase of *Azotobacter chroococcum* is a vanadium enzyme, *Nature*, **1986**, 322, 388-390.
- [33] A.A. Tsygankov, Nitrogen-fixing cyanobacteria: A review, *Appl. Biochem. Microbiol.*, **2007**, 43, 250-259.
- [34] J.M.L. Bell, J.C. Philp, M.S. Kuyukina, I.B. Ivshina, S.A. Dunbar, C.J. Cunningham, P. Anderson, Methods evaluating vanadium tolerance in bacteria

- isolated from crude oil contaminated land, *J. Microbiol. Methods*, **2004**, *58*, 87-100.
- [35] D.R. Lovely, Dissimilatory metal reduction, *Annu. Rev. Microbiol.*, **1993**, *47*, 263-290.
- [36] R.W. Collier, Particulate and dissolved vanadium in the North Pacific Ocean, *Nature*, **1984**, *309*, 441-444.
- [37] J.J. Middelberg, D. Hoede, H.A. van der Sloot, C.H. van der Weijden, J. Wijkstra, Arsenic, antimony and vanadium in the North Atlantic Ocean, *Geochim. Cosmochim. Acta*, **1988**, *52*, 2871-2878.
- [38] Y. Harita, T. Hori, M. Sugiyama, Release of trace oxyanions from littoral sediments and suspended particles induced by pH increase in the epilimnion of lakes, *Limnol. Oceanogr.*, **2005**, *50*, 636-645.
- [39] A.M. Shiller, E.A. Boyle, Dissolved vanadium in rivers and estuaries, *Earth Planet. Sci. Lett.*, **1987**, *86*, 214-224.
- [40] A.M. Shiller, L. Mao, Dissolved vanadium on the Louisiana Shelf: effect of oxygen depletion, *Cont. Shelf Res.*, **1999**, *19*, 1007-1020.
- [41] D.R. Nicholas, S. Ramamoorthy, V. Palace, S. Spring, J.N. Moore, R.F. Rosenzweig, Biological transformations of arsenic in circumneutral freshwater sediments, *Biodegradation*, **2003**, *14*, 123-137.
- [42] B.E. Erickson, G.R. Helz, Molybdenum (VI) speciation in sulfidic waters: stability and lability of thiomolybdates, *Geochim. Cosmochim. Acta*, **2000**, *64*, 1149-1158.
- [43] G.R. Helz, T.P. Vorlicek, M.D. Kahn, Molybdenum scavenging by iron monosulfide, *Environ. Sci. Technol.*, **2004**, *38*, 4263-4268.

- [44] D. Wallschläger, C.J. Stacey, Determination of (oxy)thioarsenates in sulphidic waters, *Anal. Chem.*, **2007**, *79*, 3873-3880.
- [45] M. Motelica-Heino, C. Naylor, H. Zhang, W. Davison, Simultaneous release of metals and sulfide in lacustrine sediment, *Environ. Sci. Technol.*, **2003**, *37*, 4374-4381.
- [46] N. Tribovillard, T.J. Alego, T. Lyons, A. Riboulleau, Trace metals as paleoredox and paleoproductivity proxies: An update, *Chem. Geol.*, **2006**, *232*, 12-32.

Tables


Table 1. Pearson product-moment correlation coefficients (PMCC) of mm-averaged data in Figure 2 (n = 11).

Analyte 1	Analyte 2	PMCC
Greyscale	Phosphorus	-0.68
Greyscale	Vanadium	-0.75
Greyscale	Arsenic	-0.61
Phosphorus	Vanadium	0.89
Phosphorus	Arsenic	0.49
Vanadium	Arsenic	0.43


Pre-Print Version

Figures


Fe (RSD 5.4%)

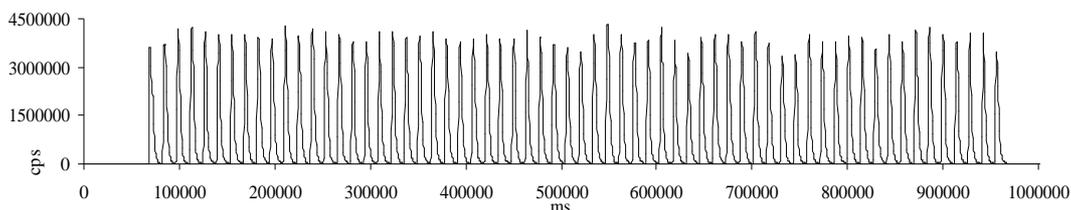

P (RSD 8.4%)

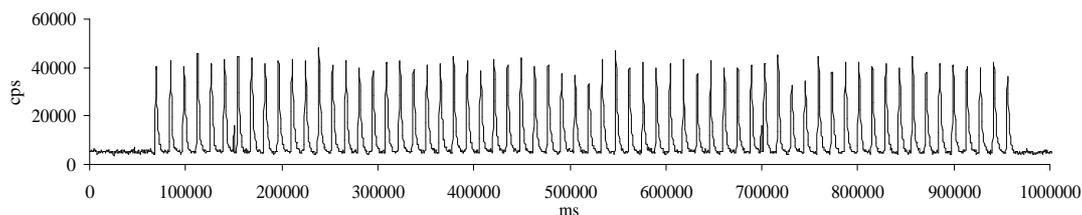

V (RSD 8.8%)

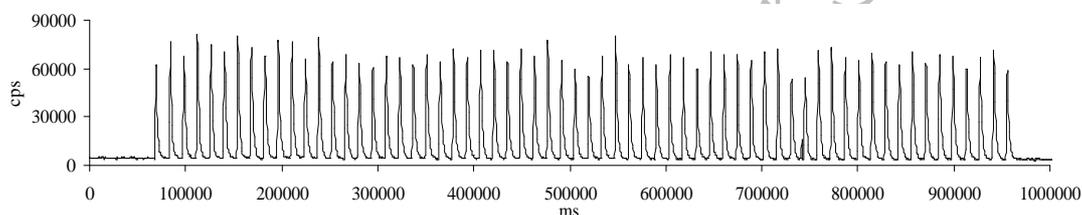

As (RSD 9.9%)

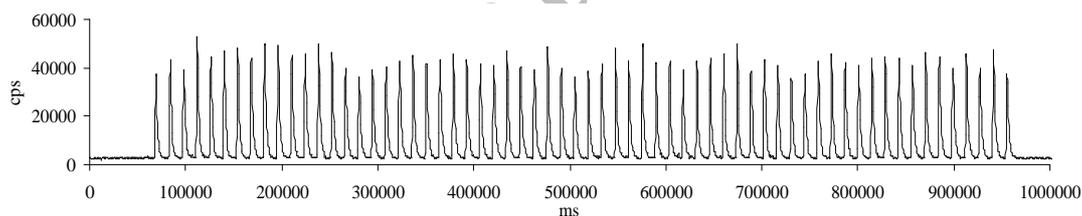


Figure 1. Time series of counts per second (cps) recorded by the mass spectrometer detector for a 64 spot ablation grid with 200 μm spacing of a standard gel exposed to 1.4 nmol cm^{-2} of P and 0.14 nmol cm^{-2} of V and As. Fe is used as the internal standard. Values for the residual standard deviation (RSD) are for the resolved peak areas before internal standardisation.

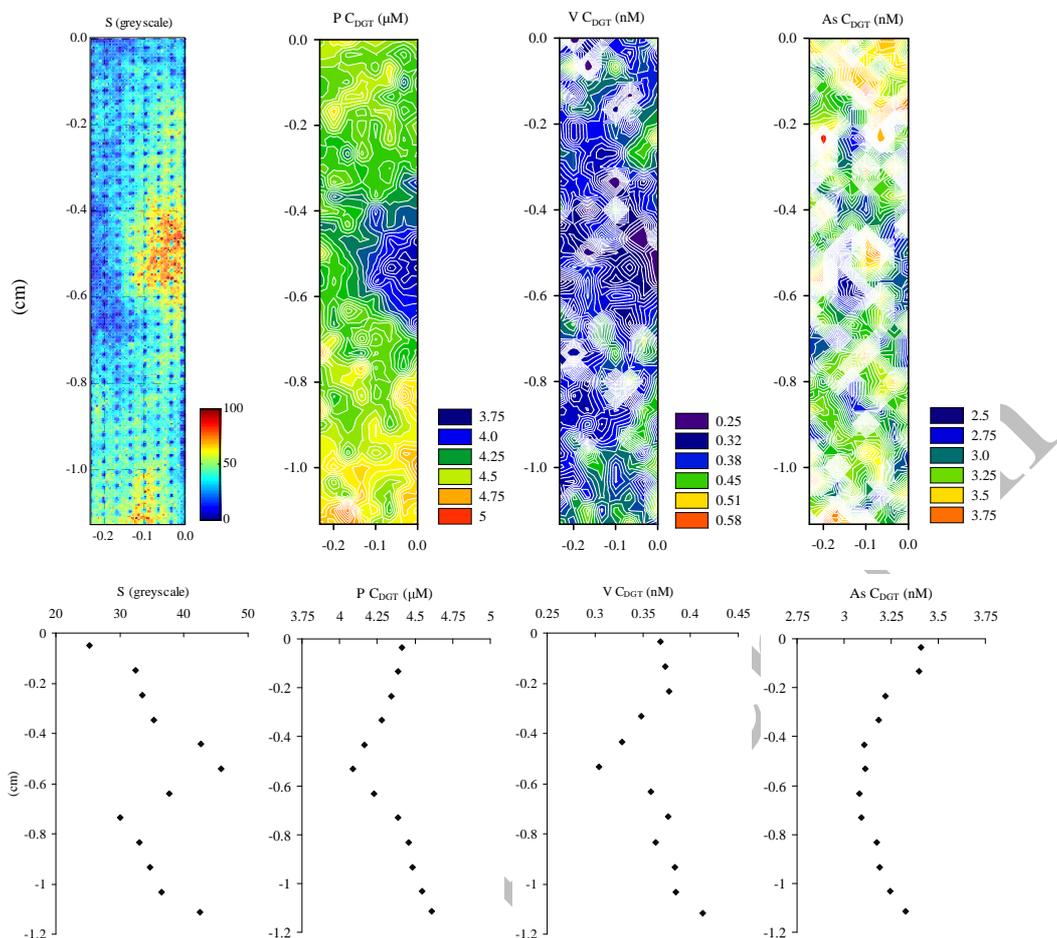


Figure 2. Analyte profiles at a microniche. 2-D images show greyscale density for sulphide and DGT resolved concentrations (C_{DGT}) for P, V and As. The ablation grid (eight columns, 35 rows) can be seen on the sulphide scan with each point representing a data point for the 2D C_{DGT} figures. 1-D plots show concentration-depth profiles obtained by averaging the data into one-mm deep vertical slices (24 ablation spots per point, except the lowest point where the bottom two rows of ablation spots are averaged). Averaged greyscales values are affected, due to the ablation spots having low values. The elevated sulphide at the very bottom of the analysed area is possibly associated with a general elevation in sulphide at that depth, as such a feature was present across the entire width (18 mm) of the DGT probe for that depth coordinate (this work, unpublished data). Distances are in cm and are relative to the top right hand corner of the area.

High-resolution two-dimensional quantitative analysis of phosphorus, vanadium and arsenic, and qualitative analysis of sulphide, in a freshwater sediment.

Accessory materials

Gel drying procedure

Gels were initially part dried by placing the gel (and backing filter membrane) onto a thick blotting paper, the gels were covered with a plastic film and put under light pressure overnight. This pre-drying step was necessary to avoid inhomogeneous areas forming on the gels. Gels were then transferred to a gel drier (Bio-Rad model 543) at 60°C for eight hours (A. Widerlund, unpublished data). When dry, areas of interest on the gel were cut and mounted onto glass microscope slides with double sided adhesive tape.

Laser ablation TRA data processing procedure

The PlasmaLab software package (version 2.5.3.280) enables data processing using a transient time resolved analysis (TRA) application. The software identifies analyte peaks as counts per second (cps), performs background corrections and calculates peak areas as integrated counts per second. Peak finding was specified as absolute cps values with the baseline subtracted. Minimum peak width was set at 11 time-slices and peak edge signal averaging was set at two data points. All other values were set at zero and no smoothing was specified. Analyte peaks for one element can be copied to all remaining elements (and other samples if they contain the same number of ablations), provided the position of the analyte peaks does not vary significantly with time. Values for peak areas can then be copied into alternative software (e.g. Excel or SigmaPlot) for data analysis (Warnken et al, 2004)^[5].