

Multi-switching combination synchronization of chaotic Systems

U. E. Vincent · A. .O. Saseyi · P. V. E. McClintock

Received: August 11, 2014 / Revised: March 26, 2015/ Accepted:

Abstract A novel synchronization scheme is proposed for a class of chaotic systems, extending the concept of multi-switching synchronization to combination synchronization such that the state variables of two or more driving systems synchronize with different state variables of the response system, simultaneously. The new scheme, multi-switching combination synchronization (MSCS) represents a significant extension of earlier multi-switching schemes in which two chaotic systems, in a driver-response configuration, are multi-switched to synchronize up to a scaling factor. In MSCS, the chaotic driving systems multi-switch a response chaotic system in combination synchronization. For certain choices of the scaling factors, MSCS reduces to multi-switching synchronization, implying that the latter is a special case of MSCS. A theoretical approach to control design, based on backstepping, is presented and validated using numerical simulations.

Keywords Multi-switching · Combination Synchronization · Chaos · Backstepping

U. E. Vincent

Permanent address: Department of Physical Sciences, Redeemer's University, Redemption City, Nigeria.

Department of Physics, Lancaster University, Lancaster LA1 4YB, United Kingdom. E-mail: u.vincent@lancaster.ac.uk; ue_vincent@yahoo.com

A. .O. Saseyi

Department of Physical Sciences, Redeemer's University, Redemption City, Nigeria.

P. V. E. McClintock

Department of Physics, Lancaster University, Lancaster LA1 4YB, United Kingdom.

1 Introduction

The possibility of realizing synchronization in coupled or forced chaotic systems came as a major breakthrough in nonlinear science. Until 1990 it had appeared impossible, due to the well known divergence of trajectories caused by the sensitivity of chaotic systems to initial conditions, but the pioneering work of Pecora and Carroll [1] showed that this negative expectation was wrong. Since then, the synchronization of chaotic systems has attracted much attention. In addition to its own intrinsic interest, and its rich variety of intriguing features, chaos synchronization has acquired a wide range of important interdisciplinary applications, including time series analysis, secure communication systems, modeling cardiac rhythm and brain activity, and earthquake dynamics [2–6]. These have provided the motivation and driving force for the huge effort currently being devoted to ways of achieving chaos synchronization.

In general, for coupled or interacting chaotic systems with state space variables $x_1(t)$ and $x_2(t)$, a complete /identical synchronization manifold $x_1(t) = x_2(t)$ exists if the condition, $\lim_{t \rightarrow \infty} \|x_1(t) - x_2(t)\| = 0, \forall t \geq 0$, is satisfied [1]. However, as proposed by Mainieri and Rehacek [7], two chaotic systems can synchronize up to a scaling factor, ϕ such that $\lim_{t \rightarrow \infty} \|x_1(t) - \phi x_2(t)\| = 0, \forall t \geq 0$. In this case, they achieve projective synchronization (PS). Projective synchronization has been investigated with increasing interest in recent years due to the possibility of achieving faster communication with its scaling feature; and a wide variety of PS schemes has been proposed (See Refs. [8–19] and references therein); all of them are concerned with a single driving - single response configuration.

Very recently, however, a novel form of projective synchronization was proposed by Luo et al. [20], in which three classic chaotic systems were made to synchronize simultaneously via systematically designed nonlinear controls; two of which were driving a single response system, in a kind of double-driving/ single-response arrangement. The implication of combination synchronization proposed in [20] for communication is such that a signal can be split into two, each loaded and transmitted between two drive systems or at different intervals. Further developments in this direction are reported in Refs. [21–27]; in particular, compound synchronization [28,29], double compound synchronization [30], combination-combination synchronization [23,24,26], finite-time combination-combination synchronization [24–27], finite-time stochastic combination synchronization [22], hybrid and reduced-order hybrid combination synchronization [31,32] have been proposed and investigated. It is noteworthy that in all these previous works the goals were to achieve synchronization between state variables of the driver systems and that of identical response system. This constrained the coupled systems to evolve in predetermined and predictable directions simultaneously.

In order to improve the security of information transmission via synchronization it may be required that in, master-slave synchronization, different states of the slave system are synchronized with desired state of the master system in a multi-switching manner. This form of synchronization was proposed by Ucar et al. based on active control formalism [33]. Despite its clear relevance to information security, only a few studies of this kind of synchronization have been reported [34–40]. To the best of our knowledge, all the work on multi-switching synchronization of this kind reported in the literature has related to single-driver/single-response systems.

In this paper, we propose a multi-switching combination synchronization scheme, wherein two driver chaotic systems are multi-switched in diverse ways with a single response chaotic system. The possibility of realizing such a form of synchronization would present varieties of synchronization directions between the driver systems' and response system's variables, thereby ensuring better security when employed in communications applications.

The rest of the paper is organized as follows: In section 2, the definitions and basic formulation of multi-switching combination synchronization (MSCS) are presented. In section 3, an example of the MSCS of three classic chaotic systems is formulated. The corresponding numerical simulation results are presented in section 4. The paper is summarized and concluded in section 5.

2 Definition and Formulation of MSCS

Consider the following master-slave n -dimensional chaotic systems, where the master systems are given by

$$\begin{aligned} \dot{x}_{1m} &= f_{1x}(x_{1m}, \dots), \dot{x}_{2m} = f_{2x}(x_{1m}, \dots), \dots, \\ \dot{x}_{nm} &= f_{nx}(x_{1m}, \dots) \end{aligned} \quad (1)$$

and

$$\begin{aligned} \dot{y}_{1m} &= f_{1y}(y_{1m}, \dots), \dot{y}_{2m} = f_{2y}(y_{1m}, \dots), \dots, \\ \dot{y}_{nm} &= f_{ny}(y_{1m}, \dots) \end{aligned} \quad (2)$$

and the controlled slave system, is given by

$$\begin{aligned} \dot{z}_{1s} &= g_{1z}(z_{1s}, \dots) + U_1, \dot{z}_{2s} = g_{2z}(z_{1s}, \dots) + U_2, \dots, \\ \dot{z}_{ns} &= g_{nz}(z_{1s}, \dots) + U_n; \end{aligned} \quad (3)$$

where $x_{jm}, y_{km}, z_{is}(i, j, k = 1, 2, \dots, n) \in R^n$ are state space vectors of the systems, $f_{jx}, f_{ky}, g_{iz} : R^n \rightarrow R^n$ are three continuous vector functions composed of linear and nonlinear components; and $U_i(i = 1, 2, \dots, n) : R^n \rightarrow R^n$ is a nonlinear control function. The indices m and s stand for master and slave systems, respectively.

Definition 1 [20] *If there exists three constant matrices $A, B, C \in R^n$ and $C \neq 0$, such that*

$$\lim_{t \rightarrow \infty} \|Cz_{is} - Ax_{jm} - By_{km}\| = 0,$$

where $\|\cdot\|$ is the matrix norm and A, B, C are scaling matrices, then, systems (1), (2) and (3) are said to be in combination synchronization.

Comment 1 *The error states in relation to the definition 1 are strictly chosen to satisfy the definition, $e_{ijk}(i = j = k)$, where i, j and k are the indices of the error.*

Definition 2 : *If the error states in relation to Definition 1 are redefined such that $i = j \neq k$ or $i = k \neq j$, or $j = k \neq i$ or $i \neq j \neq k$, $i \neq j = k$ or $j \neq i = k$ and*

$$\lim_{t \rightarrow \infty} \|Cz_{is} - Ax_{jm} - By_{km}\| = 0,$$

then, systems (1), (2) and (3) are said to be in multi-switching combination synchronization.

Comment 2 *We refer to the conditions, $i = j \neq k$ or $i = k \neq j$, $j = k \neq i$ or $i \neq j \neq k$, as generic conditions that must be met. In addition, there are several non-generic cases where the above possible generic cases are combined in a mixed mode.*

To formulate the active backstepping procedure, we define a typical multi-switching synchronization error for a 3-dimensional system, as

$$\begin{aligned} e_{123} &= \gamma_1 z_{1s} - \alpha_2 x_{2m} - \beta_3 y_{3m}, \\ e_{231} &= \gamma_2 z_{2s} - \alpha_3 x_{3m} - \beta_1 y_{1m}, \\ e_{312} &= \gamma_3 z_{3s} - \alpha_1 x_{1m} - \beta_2 y_{2m}, \end{aligned} \quad (4)$$

and obtain the following error dynamical system

$$\begin{aligned} \dot{e}_{123} &= \gamma_1 g_{1z} + \gamma_1 U_1 - \alpha_2 f_{2x} - \beta_3 f_{3y}, \\ \dot{e}_{231} &= \gamma_2 g_{2z} + \gamma_2 U_2 - \alpha_3 f_{3x} - \beta_1 f_{1y}, \\ \dot{e}_{312} &= \gamma_3 g_{3z} + \gamma_3 U_3 - \alpha_1 f_{1x} - \beta_2 f_{2y}, \end{aligned} \quad (5)$$

where $\alpha_j, \gamma_i, \beta_k (i, j, k = 1, 2, 3)$ are scaling factors. In principle and by some algebraic manipulations, the error dynamical system (5) can be expressed in terms of the synchronization error, e_{123}, e_{231} and e_{312} , because g_{iz}, f_{jx} , and f_{ky} consist of linear and nonlinear parts. Thus, the synchronization problem reduces to that of asymptotic stabilization of Eq. (5) with appropriate control inputs. Here, we use the active backstepping technique, because it provides a systematic design approach for both control and synchronization, and guarantees global stability of the closed loop system. The main feature of this approach is that it allows for flexibility in the construction of control laws, so that the control strategy can be extended very easily to higher-dimensional systems. We now provide a description of a simple design procedure for active backstepping-based multi-switching combination synchronization.

et $\nu_1 = e_{123}$, so that we obtain the ν_1 -subsystem

$$\dot{\nu}_1 = F_1(\nu_1, f_{xyz}, U_1); \quad (6)$$

where f_{xyz} is a nonlinear function derived from $g_{iz}(z_{is}), f_{jx}(x_{jm})$, and $f_{ky}(y_{km})$. Considering the error variable e_{231} as a virtual control input via a classical Lyapunov function V_1 , if V_1 satisfies the conditions

$$\begin{cases} V_1(e_{231}) > 0 & \text{if } e_{231} \neq 0, \\ V_1(e_{231}) = 0 & \text{if } e_{231} = 0, \end{cases} \quad (7)$$

and

$$\begin{cases} \dot{V}_1(e_{231}) < 0 & \text{if } e_{231} \neq 0, \\ \dot{V}_1(e_{231}) = 0 & \text{if } e_{231} = 0, \end{cases} \quad (8)$$

then, the ν_1 -subsystem of Eq. (6) is asymptotically stable. When e_{231} has been designed, we can obtain the following (ν_1, ν_2) -subsystem

$$\begin{cases} \dot{\nu}_1 = F_1(\nu_1, f_{xyz}, U_1), \\ \dot{\nu}_2 = F_2(\nu_1, \nu_2, e_{123}, g_{xyz}, U_2), \end{cases} \quad (9)$$

by setting $\nu_2 = e_{231} - \alpha_1(\nu_1)$; where $\alpha_1(\nu_1)$ is a virtual control and g_{xyz} is a nonlinear function derived from $g_{iz}(z_{is}), f_{jx}(x_{jm})$ and $f_{ky}(y_{km})$.

In other to stabilize the (ν_1, ν_2) -subsystem, a second positive Lyapunov function V_2 is chosen. The process continues by consideration of the variable $e_{312} = \alpha_2(\nu_1, \nu_2)$ as the virtual control input for the (ν_1, ν_2) -subsystem, and so on. Then, if \dot{V}_2 is negative definite, we can conclude that (ν_1, ν_2) -subsystem is asymptotically stable. Finally, the full (ν_1, ν_2, ν_3) -system can be constructed and stabilized in the same manner.

3 MSCS of three chaotic systems

In order to generalize the concept, we examine multi-switching combination synchronization of three strictly different chaotic systems, namely, Rössler, Newton - Leipnik, and Lorenz systems. The Rössler and Newton-Leipnik systems provide the driving, and are represented by the state variables x, y as

$$\begin{aligned} \dot{x}_1 &= -x_2 - x_3, \\ \dot{x}_2 &= x_1 + a_1 x_2, \\ \dot{x}_3 &= b_1 + x_3(x_2 - c_1), \end{aligned} \quad (10)$$

and

$$\begin{aligned} \dot{y}_1 &= -a_2 y_1 + y_2 + 10 y_2 y_3, \\ \dot{y}_2 &= -y_1 - 0.4 y_2 + 5 y_1 y_3, \\ \dot{y}_3 &= b_2 y_3 - 5 y_1 y_2; \end{aligned} \quad (11)$$

while the response of the Lorenz system represented by the state variable z is given by

$$\begin{aligned} \dot{z}_1 &= a_3(z_2 - z_1) + U_1, \\ \dot{z}_2 &= b_3 z_1 - z_2 - z_1 z_3 + U_2, \\ \dot{z}_3 &= z_1 z_2 - c_3 z_3 + U_3, \end{aligned} \quad (12)$$

where U_1, U_2 and U_3 are controllers to be designed.

There are several possible generic switching combinations that could exist for the drive-response system (10), (11) and (12), some of which are given below.

For $i = j \neq k$, we have: $e_{112}, e_{221}, e_{331}$ and $e_{113}, e_{223}, e_{332}$.

For $i = k \neq j$, we have: $e_{121}, e_{212}, e_{313}$ and $e_{131}, e_{232}, e_{323}$.

For $j = k \neq i$, we have: $e_{122}, e_{211}, e_{311}$ and $e_{133}, e_{233}, e_{322}$.

For $i \neq j \neq k$, we have: $e_{123}, e_{213}, e_{312}$ and $e_{132}, e_{231}, e_{321}$.

For $i \neq j = k$, we have $e_{122}, e_{233}, e_{311}$ and $e_{133}, e_{211}, e_{322}$.

For $j \neq i = k$, we have $e_{121}, e_{212}, e_{313}$.

In this paper, we present results for some particular switching combinations, randomly selected from the combinations given above. They are:

$$\begin{aligned} e_{112} &= \gamma_1 z_1 - \alpha_1 x_1 - \beta_2 y_2, \\ e_{213} &= \gamma_2 z_2 - \alpha_1 x_1 - \beta_3 y_3, & \text{Switch 1} \\ e_{311} &= \gamma_3 z_3 - \alpha_1 x_1 - \beta_1 y_1; \end{aligned} \quad (13)$$

$$\begin{aligned} e_{123} &= \gamma_1 z_1 - \alpha_2 x_2 - \beta_3 y_3, \\ e_{213} &= \gamma_2 x_2 - \alpha_1 x_1 - \beta_3 y_3, & \text{Switch 2} \\ e_{323} &= \gamma_3 z_3 - \alpha_2 x_2 - \beta_3 y_3; \end{aligned} \quad (14)$$

$$\begin{aligned} e_{112} &= \gamma_1 z_1 - \alpha_1 x_1 - \beta_2 y_2, \\ e_{223} &= \gamma_2 z_2 - \alpha_2 x_2 - \beta_3 y_3, & \text{Switch 3} \\ e_{321} &= \gamma_3 z_3 - \alpha_2 x_2 - \beta_1 y_1; \end{aligned} \quad (15)$$

$$\begin{aligned} e_{113} &= \gamma_1 z_1 - \alpha_1 x_1 - \beta_3 y_3, \\ e_{221} &= \gamma_2 z_2 - \alpha_2 x_2 - \beta_1 y_1, & \text{Switch 4} \\ e_{312} &= \gamma_3 z_3 - \alpha_1 x_1 - \beta_2 y_2. \end{aligned} \quad (16)$$

The notations for the scaling factors $\alpha_i, \gamma_j, \beta_k (i, j, k = 1, 2, 3)$, are set for convenient; and may assume different or same values in applications. For simplicity and reference, we refer to the error dynamics Eq. (13) as Switch 1, Eq. (14) as Switch 2, Eq. (15) as Switch 3 and Eq. (16) as Switch 4.

3.1 Switch 1

For Switch 1 Eq. (13), the time derivative of the errors is given by

$$\begin{aligned} \dot{e}_{112} &= \gamma_1 \dot{z}_1 - \alpha_1 \dot{x}_1 - \beta_2 \dot{y}_2, \\ \dot{e}_{213} &= \gamma_2 \dot{z}_2 - \alpha_1 \dot{x}_1 - \beta_3 \dot{y}_3, \\ \dot{e}_{311} &= \gamma_3 \dot{z}_3 - \alpha_1 \dot{x}_1 - \beta_1 \dot{y}_1. \end{aligned} \quad (17)$$

Substituting for $\dot{z}_1, \dot{x}_1, \dot{y}_2, \dot{z}_2, \dot{y}_3, \dot{z}_3$ and \dot{y}_1 from equations (10),(11) and (12), the error dynamical system for Switch 1 can be written as:

$$\begin{aligned} \dot{e}_{112} &= \frac{\gamma_1 a_3}{\gamma_2} e_{213} - a_3 e_{112} + f + \gamma_1 U_1 \\ \dot{e}_{213} &= \frac{\gamma_2 b_3}{\gamma_1} e_{112} - \frac{\gamma_2}{\gamma_1 \gamma_3} e_{112} e_{311} - \frac{\gamma_2}{\gamma_1 \gamma_3} [\alpha_1 x_1 + \beta_1 y_1] e_{112} \\ &\quad - e_{213} - \frac{\gamma_2}{\gamma_1 \gamma_3} [\alpha_1 x_1 + \beta_2 y_2] e_{311} + g + \gamma_2 U_2 \\ \dot{e}_{311} &= \frac{\gamma_3}{\gamma_1 \gamma_2} [\alpha_1 x_1 + \beta_3 y_3] e_{112} + \frac{\gamma_3}{\gamma_1 \gamma_2} e_{112} e_{213} \\ &\quad + \frac{\gamma_3}{\gamma_1 \gamma_2} [\alpha_1 x_1 + \beta_2 y_2] e_{213} - c_3 e_{311} + h + \gamma_3 U_3 \end{aligned} \quad (18)$$

where,

$$\begin{aligned} f &= \left(\frac{\gamma_1 a_3}{\gamma_2} - a_3 \right) \alpha_1 x_1 + \frac{\gamma_1 a_3 \beta_3}{\gamma_2} y_3 - a_3 \beta_2 y_2 + \alpha_1 x_2 \\ &\quad + \alpha_1 x_3 + \beta_2 y_1 + 0.4 \beta_2 y_2 - 5 \beta_2 y_1 y_3 \\ g &= \frac{\gamma_2 b_3}{\gamma_1} (\alpha_1 x_1 + \beta_2 y_2) + \alpha_1 (x_2 + x_3) - \beta_3 [b_2 y_3 - 5 y_1 y_2] \\ &\quad - [\alpha_1 x_1 + \beta_3 y_3] - \frac{\gamma_2}{\gamma_1 \gamma_3} [(\alpha_1 x_1 + \beta_2 y_2)(\alpha_1 x_1 + \beta_1 y_1)] \\ h &= \frac{\gamma_3}{\gamma_1 \gamma_2} (\alpha_1 x_1 + \beta_2 y_2)(\alpha_1 x_1 + \beta_3 y_3) + \alpha_1 (x_2 + x_3) \\ &\quad - c_3 (\alpha_1 x_1 + \beta_1 y_1) + \beta_1 (+a_2 y_1 - y_2 - 10 y_2 y_3) \end{aligned}$$

Theorem 1 : If the control functions U_1, U_2 and U_3 are chosen such that

$$U_1 = -\frac{1}{\gamma_1} f,$$

$$U_2 = -\frac{1}{\gamma_2} \left[\left(\frac{\gamma_2 b_3}{\gamma_1} - \frac{\gamma_2}{\gamma_1 \gamma_3} (\alpha_1 x_1 + \beta_1 y_1) \right) \nu_1 + g \right], \quad (19)$$

$$\begin{aligned} U_3 &= -\frac{1}{\gamma_3} \left[\frac{\gamma_3}{\gamma_1 \gamma_2} (\alpha_1 x_1 + \beta_3 y_3) \nu_1 + \frac{\gamma_3}{\gamma_1 \gamma_2} (\alpha_1 x_1 + \beta_2 y_2) \nu_2 \right. \\ &\quad \left. + \frac{\gamma_3}{\gamma_1 \gamma_2} \nu_1 \nu_2 + h \right], \end{aligned}$$

where $\nu_1 = e_{112}, \nu_2 = e_{213}$, then the drive systems (10) and (11) will achieve multi-switching combination synchronization with the response system (12).

Proof 1: We use the active backstepping technique to prove the above theorem.

Let $\nu_1 = e_{112}$; its derivative is given by

$$\dot{\nu}_1 = \dot{e}_{112} = \frac{\gamma_1 a_3}{\gamma_2} e_{213} - a_3 e_{112} \quad (20)$$

where $e_{213} \equiv \alpha_1(\nu_1)$ can be regarded as a virtual controller. For the design of $\alpha_1(\nu_1)$ to stabilize the ν_1 -subsystem defined by equation (20), we consider the following Lyapunov function

$$V_1 = \frac{1}{2} \nu_1^2. \quad (21)$$

Its time derivative is given by

$$\dot{V}_1 = \nu_1 \dot{\nu}_1 = \nu_1 \left(\frac{\gamma_1 a_3}{\gamma_2} \alpha_1(\nu_1) - a_3 \nu_1 \right). \quad (22)$$

The virtual control $\alpha_1(\nu_1)$ is an estimated control input and it can take any convenient values that yields the desired control function. In practice, and for the purpose of applications, $\alpha_1(\nu_1)$ should be chosen such that the overall controller complexity is reduced as much as possible. Suppose $\alpha_1(\nu_1) \equiv 0$, then $\dot{V}_1 = -a_3 \nu_1^2 \leq 0$ is negative definite and, according to Lyapunov stability theorem, the ν_1 -subsystem is asymptotically stable.

If we denote the error between e_{213} and $\alpha_1(\nu_1)$ by ν_2 , i.e $\nu_2 = e_{213} - \alpha_1(\nu_1)$, then, we have the (ν_1, ν_2) -subsystem

$$\begin{aligned} \dot{\nu}_1 &= \frac{\gamma_1 a_3}{\gamma_2} \nu_2 - a_3 \nu_1, \\ \dot{\nu}_2 &= \left(\frac{\gamma_2 b_3}{\gamma_1} - \frac{\gamma_2}{\gamma_1 \gamma_3} [\alpha_1 x_1 + \beta_1 y_1] \right) \nu_1 - \nu_2 - \frac{\gamma_2}{\gamma_1 \gamma_3} \nu_1 e_{311}, \\ &\quad - \frac{\gamma_2}{\gamma_1 \gamma_3} [\alpha_1 x_1 + \beta_2 y_2] e_{311} + g + \gamma_2 U_2. \end{aligned} \quad (23)$$

To stabilize the (ν_1, ν_2) -subsystem, $e_{311} \equiv \alpha_2(\nu_1, \nu_2)$ can be regarded as a virtual controller. Assuming the Lyapunov function

$$V_2 = V_1 + \frac{1}{2} \nu_2^2,$$

and its time derivative given by

$$\begin{aligned} \dot{V}_2 &= -a_3 \nu_1^2 - \nu_2^2 + \nu_2 \left[\left(\frac{\gamma_2 b_3}{\gamma_1} - \frac{\gamma_2}{\gamma_1 \gamma_3} [\alpha_1 x_1 + \beta_1 y_1] \right) \nu_1 \right. \\ &\quad \left. - \frac{\gamma_2}{\gamma_1 \gamma_3} (\nu_1 + \alpha_1 x_1 + \beta_2 y_2) \alpha_2(\nu_1, \nu_2) + g + \gamma_2 U_2 \right] \end{aligned} \quad (24)$$

Similarly, if we let $\alpha_2(\nu_1, \nu_2) = 0$ and the control function U_2 is chosen as in Theorem 1, then, $\dot{V}_2 = -a_3\nu_1^2 - \nu_2^2 < 0$, implying that the (ν_1, ν_2) -subsystem is asymptotically stable.

Finally, suppose $\nu_3 \equiv e_{311} - \alpha_2(\nu_1, \nu_2)$. We then obtain

$$\dot{\nu}_3 = \frac{\gamma_3}{\gamma_1\gamma_2}[\alpha_1x_1 + \beta_3y_3]\nu_1 + \frac{\gamma_3}{\gamma_1\gamma_2}\nu_1\nu_2 + \frac{\gamma_3}{\gamma_1\gamma_2}[\alpha_1x_1 + \beta_2y_2]\nu_2 - c_3\nu_3 + h + \gamma_3U_3. \quad (25)$$

This allows us to stabilize the full dimensional system (ν_1, ν_2, ν_3) , by taking the Lyapunov function as

$$V_3 = V_2 + \frac{1}{2}\nu_3^2. \quad (26)$$

Using Theorem 1, its time derivative is given by

$$\dot{V}_3 = -a_3\nu_1^2 - \nu_2^2 - c_3\nu_3^2 < 0. \quad (27)$$

Since $\dot{V}_3 = -a_3\nu_1^2 - \nu_2^2 - c_3\nu_3^2 < 0$, we can conclude, based on the Lyapunov stability theorem, that the equilibrium $(0, 0, 0)$ of the full dimensional system (ν_1, ν_2, ν_3) given by

$$\begin{aligned} \dot{\nu}_1 &= \frac{\gamma_1 a_3}{\gamma_2}\nu_2 - a_3\nu_1 \\ \dot{\nu}_2 &= -\nu_2 - \frac{\gamma_2}{\gamma_1\gamma_3}\nu_1\nu_3 - \frac{\gamma_2}{\gamma_1\gamma_3}[\alpha_1x_1 + \beta_2y_2]\nu_3 \\ \dot{\nu}_3 &= -c_3\nu_3 \end{aligned} \quad (28)$$

is asymptotically stable and that global multi-switching combination synchronization has been achieved. This ends the proof.

Comment 3 *The following corollaries can be easily obtained from Theorem 1, but their proofs are omitted here for brevity.*

If we let $\beta_1 = \beta_2 = \beta_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then we have Corollary 1.

Corollary 1 *If the controllers are chosen as*

$$\begin{aligned} U_1 &= -\alpha_1x_2 - \alpha_1x_3, \\ U_2 &= -(b_3 - \alpha_1x_1)\nu_1 - (b_3 - 1)\alpha_1x_1 + \alpha_1^2x_1^2 \\ &\quad + \alpha_1(x_2 + x_3), \\ U_3 &= -(\nu_1 + \nu_2 - c_3)\alpha_1x_1 - \nu_1\nu_2 - \alpha_1^2x_1^2 - \alpha_1(x_2 + x_3), \end{aligned} \quad (29)$$

then the drive system (10) will achieve multi-switching projective synchronization with the response system (12), with α_1 , α_2 and α_3 being the scaling factors.

If we let $\alpha_1 = \alpha_2 = \alpha_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then we obtain Corollary 2.

Corollary 2 *If the controllers are designed as*

$$\begin{aligned} U_1 &= -a_3(\beta_3y_3 - \beta_2y_2) - \beta_2y_1 - 0.4\beta_2y_2 + 5\beta_2y_1y_3, \\ U_2 &= -(b_3 - \beta_1y_1)\nu_1 - b_3\beta_2y_2 + \beta_3y_3 + \beta_2y_2\beta_1y_1 \\ &\quad + \beta_3(b_2y_3 - 5y_1y_2), \\ U_3 &= -\beta_3y_3\nu_1 - \beta_2y_2\nu_2 - \nu_1\nu_2 - \beta_2y_2\beta_3y_3 - c_3\beta_1y_1 \\ &\quad + \beta_1(a_2y_1 - y_2 - 10y_2y_3), \end{aligned} \quad (30)$$

then the drive system (11) and the response system (12) will reach multi-switching projective synchronization, with β_1 , β_2 and β_3 being the scaling factors.

Suppose $\alpha_1 = \alpha_2 = \alpha_3 = 0$, $\beta_1 = \beta_2 = \beta_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then one gets Corollary 3.

Corollary 3 *If the controllers are chosen as*

$$\begin{aligned} U_1 &= 0 \\ U_2 &= -b_3\nu_1 \\ U_3 &= -\nu_1\nu_2 \end{aligned} \quad (31)$$

then the equilibrium point $(0, 0, 0)$ of the response system (12) will be asymptotically stable, and stabilization of the system (12) is achieved.

3.2 Switch 2, Switch 3 and Switch 4

Following the same procedure presented in section 3.1, and considering Switch 2 given by Eq. (14), we can give the following Theorem 2.

Theorem 2 *If the control functions U_1 , U_2 and U_3 are chosen such that*

$$\begin{aligned} U_1 &= -\frac{1}{\gamma_1}f \\ U_2 &= -\frac{1}{\gamma_2} \left[\left(\frac{\gamma_2 b_3}{\gamma_1} - \frac{\gamma_2}{\gamma_1\gamma_3}(\alpha_2x_2 + \beta_3y_3) \right) \nu_1 + g \right] \\ U_3 &= -\frac{1}{\gamma_3} \left[\frac{\gamma_3}{\gamma_1\gamma_2}(\alpha_1x_1 + \beta_3y_3)\nu_1 + \frac{\gamma_3}{\gamma_1\gamma_2}(\alpha_2x_2 + \beta_3y_3)\nu_2 \right. \\ &\quad \left. + \frac{\gamma_3}{\gamma_1\gamma_2}\nu_1\nu_2 + h \right] \end{aligned}$$

where $\nu_1 = e_{123}$, $\nu_2 = e_{213}$, then the drive systems (10) and (11) will achieve multi-switching combination synchronization with the response system (12).

Comment 4 *The following corollaries are easily obtained from Theorem 2, but their proofs are omitted for brevity.*

If we let $\beta_1 = \beta_2 = \beta_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then we have Corollary 4.

Corollary 4 *If the controllers are chosen as*

$$\begin{aligned} U_1 &= (a_3 + a_1)\alpha_2x_2 - a_3\alpha_1x_1 + \alpha_2x_1, \\ U_2 &= \alpha_2^2x_2^2 - (b_3 - \alpha_2x_2)\nu_1 + \alpha_1(-x_2 - x_3) \\ &\quad - b_3\alpha_2x_2 - \alpha_1x_1, \\ U_3 &= \alpha_2(x_1 + a_1x_2) - \nu_1\nu_2 - (\nu_2 + \alpha_1x_1 - c_3)\alpha_2x_2, \end{aligned} \quad (32)$$

then, the driven system (10) will achieve multi-switching projective synchronization with the response system (12), with α_1 , α_2 and α_3 being the scaling factors.

If we let $\alpha_1 = \alpha_2 = \alpha_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then we obtain Corollary 5.

Corollary 5 *If the controllers are designed as*

$$U_1 = -(a_3 - b_2)\beta_3 y_3 - 5\beta_3 y_1 y_2, \quad (33)$$

$$U_2 = -(b_3 - \beta_3 y_3)\nu_1 - (b_3 - 1 - \beta_3 y_3)\beta_3 y_3 + \beta_3(b_2 y_3 - 5y_1 y_2), \quad (34)$$

$$U_3 = -[\nu_1 \nu_2 + (\nu_2 + \nu_1 - c_3)\beta_3 y_3 + \beta_3^2 y_3^2 - \beta_3(b_2 y_3 - 5y_1 y_2)],$$

then, the drive system (10 and the response system (12) will reach multi-switching projective synchronization, with β_1 , β_2 and β_3 being the scaling factor.

Suppose $\alpha_1 = \alpha_2 = \alpha_3 = 0$, $\beta_1 = \beta_2 = \beta_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then one gets Corollary 6.

Corollary 6 *If the controllers are chosen as*

$$\begin{aligned} U_1 &= 0, \\ U_2 &= -b_3 \nu_1, \\ U_3 &= -\nu_1 \nu_2, \end{aligned} \quad (35)$$

then, the equilibrium point $(0, 0, 0)$ of response system (12) will be asymptotically stable.

Similarly for Switch 3, given by Eq (15), we give the following theorem.

Theorem 3 *If the control functions U_1 , U_2 and U_3 are chosen such that*

$$\begin{aligned} U_1 &= -\frac{1}{\gamma_1} f \\ U_2 &= -\frac{1}{\gamma_2} \left[\left(\frac{\gamma_2 b_3}{\gamma_1} - \frac{\gamma_2}{\gamma_1 \gamma_3} (\alpha_2 x_2 + \beta_1 y_1) \right) \nu_1 + g \right] \\ U_3 &= -\frac{1}{\gamma_3} \left[\frac{\gamma_3}{\gamma_1 \gamma_2} (\alpha_2 x_2 + \beta_3 y_3) \nu_1 + \frac{\gamma_3}{\gamma_1 \gamma_2} (\alpha_1 x_1 + \beta_2 y_2) \nu_2 + \frac{\gamma_3}{\gamma_1 \gamma_2} \nu_1 \nu_2 + h \right] \end{aligned}$$

where $\nu_1 = e_{112}$, $\nu_2 = e_{223}$, then the drive systems (10) and (11) will achieve multi-switching combination synchronization with the response system (12).

Comment 5 *The following corollaries are easily obtained from Theorem 3, but their proofs are omitted.*

If we let $\beta_1 = \beta_2 = \beta_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then we have corollary 7.

Corollary 7 : *If the controllers are chosen as*

$$\begin{aligned} U_1 &= a_3 \alpha_1 x_1 - (\alpha_1 + a_3 \alpha_2) x_2 - \alpha_1 x_3, \\ U_2 &= (\alpha_1 + x_1 \alpha_2 x_2) - (b_3 - \alpha_2 x_2) \nu_1 + b_3 \alpha_1 x_1 + \alpha_2 (x_1 + a_1 x_2) - \alpha_2 x_2, \\ U_3 &= -\nu_1 \nu_2 - \alpha_1 x_1 \nu_2 - (\nu_1 + \alpha_1 x_1 - c_3) \alpha_2 x_2 + \alpha_2 (x_1 + a_1 x_2), \end{aligned} \quad (36)$$

then, the drive system (10) will achieve multi-switching projective synchronization with the response system (12), with α_1 , α_2 and α_3 being the scaling factors.

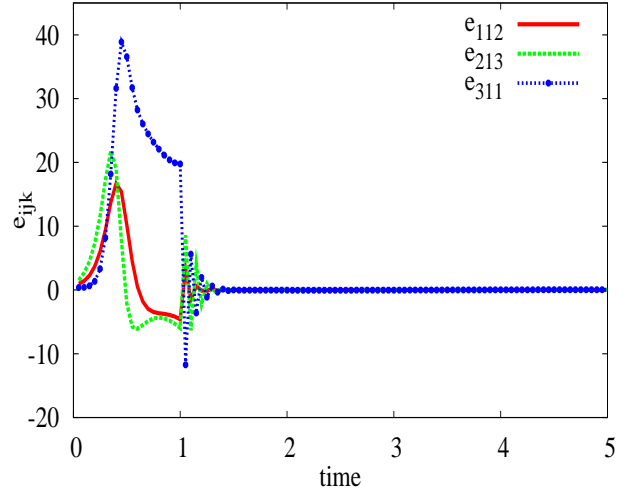


Fig. 1 Synchronization error for switch 1 with error states e_{112} , e_{213} , and e_{311} . Control was activated at time, $t \geq 1$. The parameters of the systems were chosen as $a_1 = 0.2$, $b_1 = 0.2$, $c_1 = 5.7$, $a_2 = 0.4$, $b_2 = 0.175$, $a_3 = 10.0$, $b_3 = 23.0$ and $c_3 = 8.0/3$.

If we let $\alpha_1 = \alpha_2 = \alpha_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then we obtain corollary 8.

Corollary 8 : *If the controllers are chosen as*

$$\begin{aligned} U_1 &= a_3 \beta_2 y_2 - a_3 \beta_3 y_3 - \beta_2 y_1 - 0.4 \beta_2 y_2 + 5 \beta_2 y_1 y_3, \\ U_2 &= -(b_3 - \beta_1 y_1) \nu_1 - (b_3 - \beta_1 y_1) \beta_2 y_2 + \beta_3 y_3 + \beta_3 (b_2 y_3 - 5 y_1 y_2), \\ U_3 &= -\nu_1 \nu_2 - \beta_2 y_2 \nu_2 - (\nu_1 + \beta_2 y_2) \beta_3 y_3 + c_3 \beta_1 y_1 - \beta_1 (a_2 y_1 - y_2 - 10 y_2 y_3), \end{aligned} \quad (37)$$

then, the drive system (11) will achieve multi-switching projective synchronization with the response system (12), with β_1 , β_2 and β_3 being the scaling factor.

Suppose $\alpha_1 = \alpha_2 = \alpha_3 = 0$, $\beta_1 = \beta_2 = \beta_3 = 0$, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, then one gets corollary 9.

Corollary 9 *If the controllers are chosen as*

$$\begin{aligned} U_1 &= 0, \\ U_2 &= -b_3 \nu_1, \\ U_3 &= -\nu_1 \nu_2, \end{aligned} \quad (38)$$

then, the equilibrium point $(0, 0, 0)$ of response system (12) will be asymptotically stable.

4 Numerical Results

We now present the results of numerical simulations. These were done using a fourth-order Runge - Kutta method with variable time-step. As stated earlier the

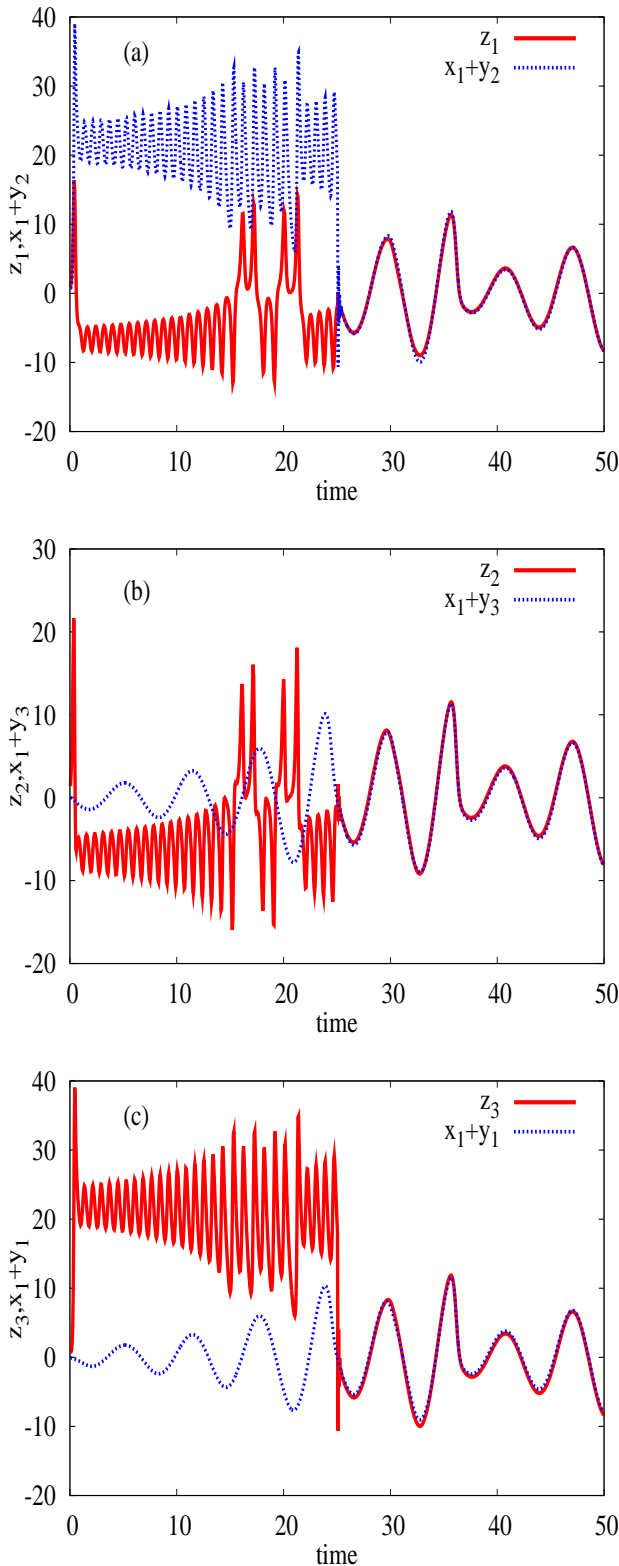


Fig. 2 Temporal behaviour of the synchronizing variables (a) $z_1, (x_1 + y_2)$, (b) $z_2, (x_1 + y_3)$, and (c) $z_3, (x_1 + y_1)$ in the multi-switching compound synchronization state, with simultaneous activation of the controls at $t \geq 25$. The parameters of the systems were chosen as $a_1 = 0.2, b_1 = 0.2, c_1 = 5.7, a_2 = 0.4, b_2 = 0.175, a_3 = 10.0, b_3 = 23.0$ and $c_3 = 8.0/3$.

main interest is to achieve multi-switching combination synchronization of the Rössler system, Newton-Leipnik system and Lorenz system. The systems' parameters were chosen as $a_1 = 0.2, b_1 = 0.2, c_1 = 5.7, a_2 = 0.4, b_2 = 0.175, a_3 = 10.0, b_3 = 23.0$ and $c_3 = 8.0/3$, in order to ensure the existence of chaotic attractors; with the initial states for the master system and for the slave system taken arbitrarily to be $(x_1, x_2, x_3) = (0.0, 1.0, -2.0), (y_1, y_2, y_3) = (0.349, 0.0, -0.16)$ and $(z_1, z_2, z_3) = (1.0, 0.40, 0.80)$, respectively. Although the system parameters may be chosen so that the systems are non-chaotic, we emphasize that the chaotic synchronized state is a special case: it is of tremendous importance in the field of secure communications; and the achievement of a synchronization state is independent of the choice of initial conditions or of the parameters of the system since the control inputs are dependent on the system parameters. Thus any set of initial conditions leading to either a chaotic or a periodic orbit would give synchronization. For the control parameters, we assume that the master systems scaling factors $\alpha_1 = \alpha_2 = \alpha_3 = 1, \beta_1 = \beta_2 = \beta_3 = -2$. Note that γ_i is the scaling factor for the slave system, and that its value should be set to unity to ensure that only the master systems are projected onto the slave [7]. Thus, $\gamma_1 = \gamma_2 = \gamma_3 = 1$, while α_j and β_k may take on some convenient values according to the required projections, ensuring bounded solutions. Boundedness of the chaotic attractors should be preserved to ensure that the orbits stay within the basins of attraction. From our numerical experiments using different values of α_j and β_k , we found that, in general, a regime of α_j and β_k exists for which the solution is bounded and synchronization is reachable. Typically this lies approximately in the control parameter range $-8 < \alpha_j, \beta_k < 8$; otherwise, the solutions are unbounded, because the orbits tends to exit the basins of attraction. Remarkably, the control parameter range could be dependent on the systems under consideration. It is interesting to note that this regime encloses a variety of possible synchronization phenomena. For instance, when $\alpha_j, \beta_k < 0$, we have projective multi-switching combination anti-synchronization, $\alpha_j, \beta_k = 1$ yields complete multi-switching combination synchronization, and when $0 < \alpha_j, \beta_k > 1$ projective multi-switching combination anti-synchronization is achieved.

For switch 1, the control inputs given in Theorem 1 were programmed to turn on at time, $t \geq 1$, simultaneously. The result is shown in Figure 1, where we can see that multi-switching combination synchronization has clearly been achieved. Similar results were obtained using corollaries 1 to 3. In addition, Figure 2 illustrates the temporal behaviour of the synchronizing

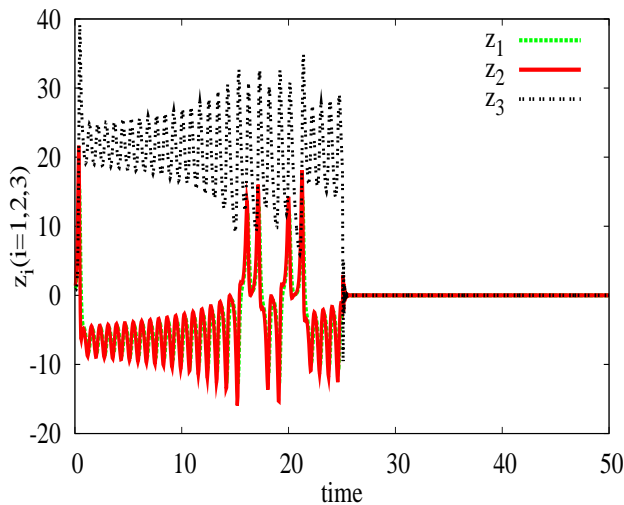


Fig. 3 Stabilization of state variables z_1, z_2, z_3 of the Lorenz system, when the controllers in Corollary 3 were activated at time, $t \geq 25$.

variables $z_1, x_1 + y_2, z_2, x_1 + y_3$, and $z_3, x_1 + y_1$ in the multi-switching compound synchronization state, with simultaneous activation of the controls at $t \geq 25$. In Figure 3, we illustrate the stabilization of the response system 12 to the equilibrium point $(0, 0, 0)$ on the application of Corollary 3.

For the other cases, namely, switches 2,3 and 4, the control functions $U_i (i = 1, 2, 3)$ were programmed to turn on at different times, namely: $t \geq 1.5$, for switch 2; $t \geq 2$, for switch 3 and $t \geq 1$, for switch 4, respectively. The numerical results corresponding to these cases are shown in Figures 4. In all these cases, synchronization have been achieved.

5 Conclusions

In summary, we have introduced, analysed and validated a novel form of chaotic synchronization that can involve three or more dynamical systems, namely, multi-switching combination synchronization (MSCS) of three chaotic systems, based on the backstepping nonlinear control approach. In this new synchronization scheme, the state space variables of the three systems are multi-switched in different ways, such that their mutual synchronization takes place between different state variables. When synchronization is achieved in this manner in the communications context, it would be difficult or even impossible for an intruder to predetermine the vector space in which synchronization would occur, thereby enhancing information security. Numerical simulations using there the *Lorenz*, *Newton-Leipnik* and *Rössler* systems have verified the theories presented. This syn-

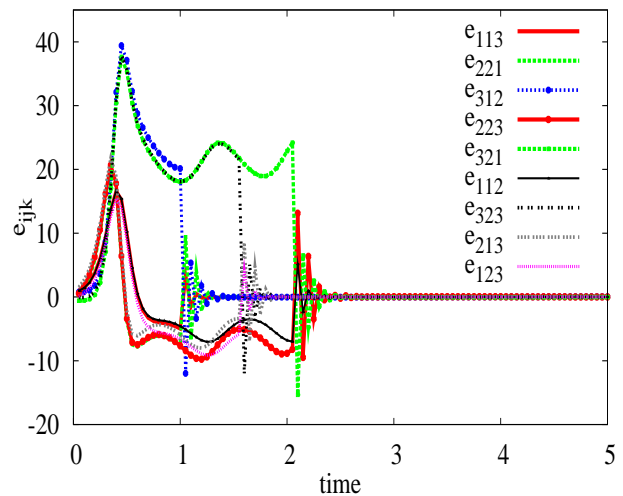


Fig. 4 Multi-switching synchronization error for switches 2,3 and 4. The controllers were activated at different times, switch 2 at time $t \geq 1.5$, Switch 3 at $t \geq 2$ and Switch 4 at $t \geq 1$. The error states are $e_{112}, e_{223}, e_{321}, e_{123}, e_{213}, e_{323}, e_{113}, e_{221}$, and e_{312} .

chronization scheme is applicable to all chaotic systems, including those of higher order that exhibits hyperchaotic behaviour. Higher dimensional systems are attractive in this context because they present more switching options for constructing the error space vector due to the larger number of variables that are then available for this purpose. Finally, the present results pave way for new directions in the study of various kinds of chaotic synchronization. For instance, considering the uncertainties in system parameters, the possibilities of function scaling factors and the effect of noise on such synchronization schemes would be interesting directions for future work.

Acknowledgements

UEV is supported by the Royal Society of London through their Newton International Fellowship Alumni scheme. We acknowledge and thank all the reviewers for their constructive and critical comments that were very useful for improving the quality of this paper.

References

1. L. M. Pecora and T. L. Carroll. Synchronization in chaotic systems. *Phys. Rev. Lett.*, 64:821–824, 1990.
2. A. Pikovsky, M. Rosenblum, and J. Kurths. *Synchronization: A Universal Concept in Non-Linear Sciences*. Cambridge University Press, United Kingdom, 2001.
3. M. Eisenkraft, R. D. Fanganiello, J. M. V. Grzybowski, D. C. Soriano, R. Attux, A. M. Batista, E. E. N. Macau, L. H. A. Monteiro, J. M. T. Romano, R. Suyama,

- and T. Yoneyama. Chaos-based communication systems in non-ideal channels. *Commun. Nonlin. Sci. Numer. Simul.*, 17(12):4707 – 4718, 2012.
4. H.-P. Ren, M. S. Baptista, and C. Grebogi. Wireless communication with chaos. *Phys. Rev. Lett.*, 110:184101, 2013.
 5. Ricardo Aguilar-López, Rafael Martnez-Guerra, and Claudia. Perez-Pinacho. Nonlinear observer for synchronization of chaotic systems with application to secure data transmission. *EPJ Special Topics*, 223:1541–1548, 2014.
 6. Rania Linda Filali, Mohamed Benrejeb, and Pierre Borne. On observer-based secure communication design using discrete-time hyperchaotic systems. *Commun. Nonlin. Sci. Numer. Sim.*, 19(5):1424 – 1432, 2014.
 7. R. Mainieri and J. Rehacek. Projective synchronization in three-dimensional chaotic systems. *Phys. Rev. Lett.*, 82:3042–3045, 1999.
 8. G.-H. Li. Projective synchronization of chaotic system using backstepping control. *Chaos, Solitons & Fractals*, 29:490–494, 2006.
 9. X. Shi and Z. Wang. Projective synchronization of chaotic systems with different dimensions via backstepping design. *Intern. J. Nonlin. Sci.*, 7(3):301–306, 2009.
 10. J. H. Park. Further results on functional projective synchronization of genesio-tesi chaotic system. *Mod. Phys. Lett. B*, 23:1889–1895, 2009.
 11. Zhou P. and Zhu W. Function projective synchronization for fractional-order chaotic systems. *Nonlinear Anal., Real World Appl.*, 12(2):811–816, 2011.
 12. F. Farivar, M. A. Shoorehdeli, M. A. Nekoui, and M. Teshnehlab. Generalized projective synchronization of uncertain chaotic systems with external disturbance. *Expert Syst. Appl.*, 38(5):4714–4726, 2011.
 13. Zhaoyan Wu, Jinqiao Duan, and Xinchu Fu. Complex projective synchronization in coupled chaotic complex dynamical systems. *Nonlin. Dyn.*, 69:771–779, 2012.
 14. Gangquan Si, Zhiyong Sun, Yanbin Zhang, and Wenquan Chen. Projective synchronization of different fractional-order chaotic systems with non-identical orders. *Nonlin. Anal. Real World Appl.*, 13(4):1761 – 1771, 2012.
 15. Faezeh Farivar, Mahdi Aliyari Shoorehdeli, Mohammad Ali Nekoui, and Mohammad Teshnehlab. Chaos control and generalized projective synchronization of heavy symmetric chaotic gyroscope systems via gaussian radial basis adaptive variable structure control. *Chaos, Solitons & Fractals*, 45(1):80–97, 2012.
 16. Hao Dai, Gangquan Si, Lixin Jia, and Yanbin Zhang. Adaptive generalized function matrix projective lag synchronization between fractional-order and integer-order complex networks with delayed coupling and different dimensions. *Phys. Scr.*, 88:055006(1–9), 2013.
 17. Xuefei Wu and Zhe Nie. Complex projective synchronization in drive-response stochastic complex networks by impulsive pinning control. *Discrete Dyn. Nature Soc.*, 2014:965297(1–8), 2014.
 18. E. S. Kuetche-Mbe, H.B. Fotsin, J. Kengne, and P. Wofo. Parameters estimation based adaptive generalized projective synchronization (GPS) of chaotic Chua’s circuit with application to chaos communication by parametric modulation. *Chaos, Solitons & Fractals*, 61:27–37, 2014.
 19. S. Wang, Y. G. Yu, and G. G. Wen. Hybrid projective synchronization of time-delayed fractional order chaotic systems. *Nonlinear Anal. Hybrid Syst.*, 11:129–138, 2014.
 20. R. Z. Luo, Y. L. Wang, and S. C. Deng. Combination synchronization of three classic chaotic systems using active backstepping design. *Chaos*, 21(4):043114, 2011.
 21. A. Wu. Hyperchaos synchronization of memristor oscillator system via combination scheme. *Adv. Differ. Eq.*, 2014:86–96, 2014.
 22. Luo Runzi and Wang Yinglan. Finite-time stochastic combination synchronization of three different chaotic systems and its application in secure communication. *Chaos*, 22:023109, 2013.
 23. Zhaoyan Wu and Xinchu Fu. Combination synchronization of three different order nonlinear systems using active backstepping design. *Nonlin. Dyn.*, 73:1863–1872, 2013.
 24. J. W. Sun, Y. Shen, G. D. Zhang, C. J. Xu, and G. Z. Cui. Combination-combination synchronization among four identical or different chaotic systems. *Nonlin. Dyn.*, 73(3):1211–1222, 2013.
 25. Huini Lin, Jianping Cai, and Jincheng Wang. Finite-time combination-combination synchronization for hyperchaotic systems. *J. Chaos*, 2013:304643(1–7), 2013.
 26. X. Zhou, L. Xiong, and X. Cai. Combination-combination synchronization of four nonlinear complex chaotic systems. *Abs. Appl. Anal.*, 2014:953265(1–14), 2014.
 27. Junwei Sun, Yi Shen, Xiaoping Wang, and Jie Chen. Finite-time combination-combination synchronization of four different chaotic systems with unknown parameters via sliding mode control. *Nonlin. Dyn.*, 76:383–397, 2014.
 28. J. Sun, Y. Shen, Q. Yi, and C. Xu. Compound synchronization of four memristor chaotic oscillator systems and secure communication. *Chaos*, 23:013140, 2013.
 29. A. Wu and J. Zhang. Compound synchronization of fourth-order memristor oscillator. *Adv. Differ. Eq.*, 2014:100–106, 2014.
 30. B. Zhang and F. Deng. Double-compound synchronization of six memristor-based Lorenz systems. *Nonlin. Dyn.*, In press:1–12, 2014.
 31. K. S. Ojo, A. N. Njah, O. I. Olusola, and M. O. Omeike. Reduced order projective and hybrid projective combination-combination synchronization of four chaotic Josephson junctions. *J. Chaos*, 2014:282407(1–9), 2014.
 32. K. S. Ojo, A. N. Njah, O. I. Olusola, and M. O. Omeike. Generalized reduced-order hybrid combination synchronization of three Josephson junctions via backstepping technique. *Nonlin. Dyn.*, 77:583–595, 2014.
 33. A. Ucar, K. E. Lonngren, and E. W. Bai. Multi-switching synchronization of chaotic systems with active controllers. *Chaos Solitons & Fractals*, 38:254–262, 2008.
 34. K. Sebastian Sudheer and M. Sabir. Switched modified function projective synchronization of hyperchaotic Qi system with uncertain parameters. *Commun. Nonlin. Sci. Numer. Simul.*, 15:4058–4064, 2010.
 35. Xing-Yuan Wang and Peng Sun. Multi-switching synchronization of chaotic system with adaptive controllers and unknown parameters. *Nonlin. Dyn.*, 63(4):599–609, 2011.
 36. Hong-Min Li and Chun-Lai Li. Switched generalized function projective synchronization of two identical/different hyperchaotic systems with uncertain parameters. *Phys. Scr.*, 86:045008 (1–8), 2012.
 37. Fei Yu, ChunHua Wang, QiuZhen Wan, and Yan Hu. Complete switched modified function projective synchronization of a five-term chaotic system with uncertain parameters and disturbances. *Pramana*, 80(2):223–235, 2013.
 38. Xiaobing Zhou, Lianglin Xiong, and Xiaomei Cai. Adaptive switched generalized function projective synchronization between two hyperchaotic systems with unknown parameters. *Entropy*, 16:377–388, 2014.

-
39. A. A. Ajayi, K. S. Ojo, U. E. Vincent, and A. N. Njah. Multiswitching synchronization of a driven hyperchaotic circuit using active backstepping. *J. Nonlin. Dyn.*, 2014:918586(1–10), 2014.
 40. A.G. Radwan, K. Moady, K.N. Salama, S. Momani, and I. Hashim. Control and switching synchronization of fractional order chaotic systems using active control technique. *J. Adv. Res.*, 5(1):125 – 132, 2014.