

Date of submission July 28, 2020.

Digital Object Identifier 10.1109/ACCESS.2017.DOI

The UK Programmable Fixed and Mobile Internet Infrastructure: Overview, capabilities and use cases deployment

HAMADA ALSHAER¹, NAVDEEP UNIYAL², KONSTANTINOS KATSAROS³, KONSTANTINOS ANTONAKOGLU⁴, STEVEN SIMPSON⁵, HANAA ABUMARSHOUD¹, HAMID FALAKI², PAUL MCCHERY⁵, CHARALAMPOS ROTSO⁵, TOKTAM MAHMOODI⁴, REZA NEJABATI², DRITAN KALESHI³, DAVID HUTCHISON⁵, HARALD HAAS¹, DIMITRA SIMEONIDOU².

¹LiFi R&D Centre, University of Edinburgh, Edinburgh EH9 3JL, UK (e-mail:{h.alshaer, h.abumarshoud, h.haas}@strath.ac.uk)

²Smart Internet Lab - HPN, Department of EEE, University of Bristol BS8 1TH, UK (e-mail:{navdeep.uniyaal, hamid.falaki, reza.nejabati, Dimitra.Simeonidou}@bristol.ac.uk)

³Digital Catapult, London UK (e-mail:{kostas.katsaros, dritan.kaleshi}@digicatapult.org.uk)

⁴Centre for Telecommunications Research (CTR), King's College London, UK (e-mail:{konstantinos.antonakoglou, toktam.mahmoodi}@kcl.ac.uk)

⁵School of Computing and Communications, Lancaster University, UK (e-mail:{s.simpson, p.mccherry, c.rotsos, d.hutchison}@lancaster.ac.uk)

Corresponding author: Hamada Alshaer (e-mail:h.alshaer@strath.ac.uk).

This work was supported by the Engineering and Physical Sciences Research Council (EPSRC) under grants EP/P003974/1 (INITIATE) and EP/L020009/1 (TOUCAN) projects.

ABSTRACT Leading state-of-the-art research facilities at the Universities of Edinburgh (UoE), Bristol (UoB), Lancaster (UoLan), King's College London (KCL) and Digital Catapult (DCAT) are interconnected through a dedicated JISC/JANET network infrastructure. Using Software Defined Networking (SDN) and Network Function Virtualisation (NFV) technologies, these distributed test-beds are integrated using a multi-domain NFV Orchestrator. This paper introduces a novel specialist distributed test-bed developed for facilitating the increasingly large and complex experimentation of future Internet system architectures, technologies, services and applications between the geographically dispersed laboratories across the UK. The aim is to enable students, researchers and enterprises to interconnect with and carry out remote experiments using these test-beds. Each one contributes a range of key capabilities for Internet research including optical networks, optical wireless and radio frequency communications, Internet of Things (IoT), SDN, NFV, as well as cloud computing technologies and services.

INDEX TERMS Software-Defined Networking, Network Function Virtualisation, NFV Orchestration, scheduling, ICT test-bed, Management and Network Orchestration.

I. INTRODUCTION

THE emergence of fifth-generation (5G) communication systems, cloud services and Internet of Things (IoT) has led to an unprecedented increase in connection capacity requirements and an exponential growth of devices that require reliable dynamic Internet connectivity. The current Internet network infrastructure is somewhat rigid, due to high-level protocols for configuration and adaptation of network policies that are implemented manually through a command line interface (CLI) [1]. There is also a large amount of installed, purpose-built hardware. This imposes strong constraints on the performance of network applications and on dynamic services provisioning and adaptability. In addition, research on future Internet technology, systems

and services requires findings from relevant and representative end-to-end (e2e) experiments.

Experimental research test-bed facilities are being developed in various information and communications technology (ICT) domains across the UK in laboratories specialized in optical [2] and radio frequency (RF) wireless communications [3], [4], signal processing, high-performance computing, quantum secured communications [5], distributed networks and systems [4], [6], the Tactile Internet [7], and also artificial intelligence and machine learning [8]. The limitations of carrying out research in these separate facilities make the current research output very limited in addressing realistic e2e Internet systems. Furthermore, research in telecommunications and networked systems re-

mains largely segregated in independent optical, wireless or computer network research labs, so researchers rarely have the opportunity to experiment across the boundaries between these domains.

The adoption of Software Defined Networking (SDN) and Network Function Virtualisation (NFV) technologies can eliminate the rigidity present in traditional networks and bring in the much needed flexibility in the network deployment and management [9]. Standards have been proposed to develop Management and Network Orchestration (MANO) systems [10] that can support dynamic network service deployment by using SDN and NFV technologies. A MANO-based architecture has been extended to support multi-domain and distributed ICT test-beds while meeting the requirements of e2e network connectivity [11]–[14]. It supports large scale test-beds that are required to validate new Internet network architectural designs.

The National Dark Fibre Facility (NDFF) [15] enables researchers to develop the underpinning communications technologies to remotely configure the future Internet network using SDN. It provides the Aurora network as a platform for network research. The USA’s main test-bed GENI (Global Environment for Network Innovations) architecture supports programmable and federated e2e virtualized slices [16]. However, the users of GENI have limited control over the selection and configuration of node resources and lower layers on which experiments run, though the nodes can be programmed on-the-fly using SDN. In contrast, the EU’s main test-bed Panlab (Pan-European Laboratory) supports a network domain federation (NDF) concept which enables different test-beds from multiple domains to run together [17]. Users have full control over the selection and configuration of components in their virtual customer test-bed. 5G EVE (5G European Validation platform for Extensive trials) [18] supports validation trials on the state-of-the-art 5G technologies: Multi-user multiple-input and multiple-output (MIMO), Massive MIMO, Radio Access Network (RAN) virtualization, latency reduction, intelligent connectivity [17]. The 5th Generation (5G) e2e Network, Experimentation, System Integration, and Showcasing project (5GENESIS) [19], [20] validates 5G key performance indicators (KPIs) for various 5G use cases, in both controlled set-ups and large-scale events. The platforms leverage the evolution of existing test-beds, owned and operated by the 5GENESIS partners, suitable for large-scale field experimentation. 5G-VINNI (virtual network infrastructure) [21] adopts the ‘network slice as a service’ (NSaaS) delivery model, whereby 5G-VINNI provisions tailored network slices to vertical applications upon request. The assigned slices meet the requirements of application for trialling activities, setting up various use cases and assessing their KPIs under different network conditions [22].

SDN exchanges (SDNxs) enable traditional networks and exchange facilities to support more services and capabilities for network technology integration. Leading research facilities at Bristol, Edinburgh, Lancaster, KCL, and Digital Cat-

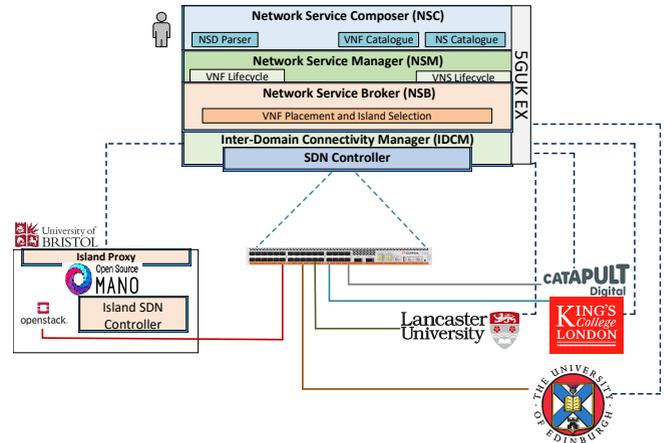


FIGURE 1. INITIATE Test-bed facility and 5GUK Exchange.

apult (London) are interconnected through a dedicated 10 Gbps JISC (Joint Information Systems Committee)/JANET network infrastructure. A SDNx interconnects these research test-bed facilities via OpenFlow (OF)-enabled switches [23], as shown in Fig. 1, which can support SDN and network slicing [24].

There are multiple challenges to developing such a large experimental test-bed facility. First, local optical and 5G wireless test-beds are required to support advanced SDN and NFV technologies that are not mature enough to cope with the dynamics of their data plane to support access for concurrent user experiments. Second, we can identify the major technical challenges for enabling a software-defined data plane of the SDNx-enabled inter-connected laboratories networks, namely: (i) simple OF-enabled switches programming, (ii) predictable services provision performance, and (iii) isolation among multiple concurrent slices and network services. Two other crucial challenges for the experimental facility are broad and long-term user engagement and facility sustainability.

The Engineering and Physical Sciences Research Council’s (EPSRC) UK programmable fixed and mobile Internet infrastructure (INITIATE) project ¹ has resulted in a U.K.-wide distributed test-network, which connects five test-beds running at the Universities of Bristol, Edinburgh, Lancaster, King’s College London and the offices of Digital Catapult, as shown in Fig. 1. The INITIATE test-network allows experimenters to use this cross-country infrastructure to deploy and try out their solutions and PoCs (Proof of Concepts). Unlike most of the established test-beds [15], [18], the INITIATE test-network does not focus on a specific technology; instead it allows multiple technologies to inter-operate in a seamless manner. All the test sites are connected through the INITIATE network, which provides a plethora of choices to users for experimentation and use cases deployment. Similar to other efforts [18], [20], [21], the INITIATE project uses NFV and SDN technologies to

¹<https://www.initiate.ac.uk/>

program the deployment of multi-domain and e2e network services across different test-beds.

A user portal has been developed on top of the SDNx to provide remote access to the INITIATE facility and the necessary information required for users to compose customised test-beds that support their research. This supports experimentally driven research that addresses the integration of multi-domain and multi-technology 5G and IoT access platforms with high-speed optical transport networks. End-users are integrated as part of the experimental process to support user-driven scenarios such as mobile edge computing, data visualization and autonomous mobility. Comprehensive experimental control and user access tools will be deployed across the INITIATE platform. These tools mainly rely on SDN/NFV principles, infrastructure virtualization and slicing to offer an open and programmable experimental infrastructure, and to support multi-tenancy for experimenters. This includes the convergence of heterogeneous separate wireless networks: wireless fidelity (Wi-Fi), light fidelity (LiFi), long-term evolution (LTE)/4G, and 5G.

The rest of this paper is structured as follows. Section II discusses the important features and capabilities of ICT test-beds running on the different islands interconnected through the INITIATE test-network. Section III describes the 5GUKex architecture, the multi-domain orchestrator of INITIATE network, and the data plane broker. Section IV discusses the use cases deployed on the INITIATE infrastructure. Finally, Section V concludes this paper and discusses ideas for further research and development.

II. NETWORK ARCHITECTURE AND CAPABILITIES

A. UNIVERSITY OF BRISTOL TEST-BED

The Smart Internet Lab ² test-bed at the University of Bristol (UoB) runs across a multi-site network connected through a number of dark fibre links with several active switching nodes. The network has a number of primary sites in Bristol: Smart Internet Lab (home of High Performance Networks (HPN) Research Group), We-The-Curious (focusing on curiosity for Science) next to Millennium Square (a large public open space) and M-Shed Museum (focusing on Places, People and Life stories in Bristol). The network core lies in the HPN Lab with edge computing nodes spread across the other sites a few kilometers from Bristol City centre. A central node at the HPN Lab hosts the cloud computing infrastructure and a mix of optical and L2 switching devices as well as cloud radio network base band processing units. Furthermore, the test-bed infrastructure offers a varying set of GPU servers, capable of supporting applications with high compute-intensive requirements for either augmented reality (AR) / virtual reality (VR) or machine-learning use cases. The access technologies for this test network are located at various outdoor and indoor locations in Bristol, as shown in Fig. 2.

As part of the research programs, satellite nodes for experimentation have also been created in locations such as the Pump Rooms (Roman Baths³) for the "smart tourist" use case demonstration. They are linked directly with BT⁴ between HPN Lab and Guildhall IT room in Bath. Other satellite nodes are connected and created via the endpoint of the JANET/JISC [25] connection to Virtus Data Centre⁵ in Slough (as part of INITIATE [26] infrastructure) terminating at the HPN. The endpoint of the JANET [25] connection to the Virtus Data Center in Slough (as part of INITIATE [26] infrastructure) terminates at the HPN Lab. It also connects to other test networks across the U.K. and Europe, including NDFP [15] and GEANT [27]. The Smart Internet Lab test-bed (HPN) has been part of multiple 5G trials [28] as well as part of the INITIATE infrastructure, which offers many computing, connectivity and access network features in bringing multiple specialized test-beds together for research and experimentation purposes.



FIGURE 2. UoB Test-bed: (a) Fibre and Radio Connectivity (b) Millennium Square Test-bed (c) M-Shed Museum.

1) Radio and Access Solutions

This test-bed uses licensed and unlicensed bands for connectivity towards user devices as endpoints for communication services, or for device-to-device connectivity. For transport Xhaul solutions, the test network is equipped with dual connectivity on most outdoor access points where the switches at the edge of the network can redirect the access

³<https://www.romanbaths.co.uk/>

⁴<https://www.bt.com/>

⁵<https://virtusdatacentres.com/>

²<http://www.bristol.ac.uk/engineering/research/smart/>

points' connectivity either via a fibre network or the wireless transport network operating in licensed or unlicensed band depending on its deployment.

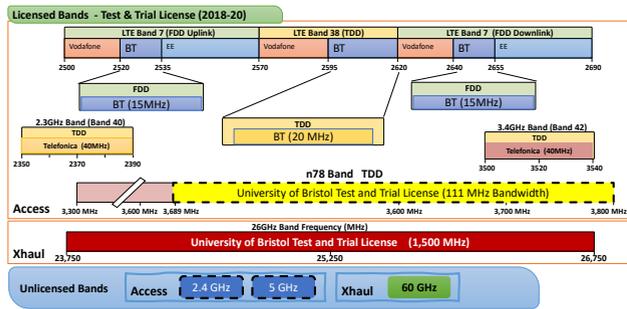


FIGURE 3. UoB Radio spectrum bands.

The access technologies in licensed bands operate in a similar way to above, i.e., they are used either for access to the end user device or for device-to-device connectivity as part of the transport network. The technologies include LTE-A and 5GNR, which provide access to the UE devices, as shown in Fig. 2. The Xhaul technology solution uses proprietary self-organising radios in creating a mesh transport network as an alternative to the fibre network, providing access to the radio cells or fixed network via the L2 switches. The radio spectrum bands for all these licensed and unlicensed bands are also shown in Fig. 3. The licensed bands B7, B38, B40 and B42 are used for LTE at various sites; and band n78 is used for 5GNR cells. The Massive MIMO (M-MIMO) technologies are demonstrated by using prototype devices as a well as commercial equipment demonstrating LTE and 5NGR physical layers with a focus on either the physical-layer experiments or the e2e service using Non-Stand Alone (NSA) core with the 5GNR radio. Commercial solutions based on 3GPP are predominantly based on Nokia proprietary solutions that include the Core networks (EPC-Rel.14) operating LTE Pico, Micro and Macro cells in the network and the evolved EPC Non-Stand Alone Rel-15 operating the macro LTE and M-MIMO 5GNR cells. Other vendors' LTE and M-MIMO solutions also have a presence in this test network; these are part of the project and the access technologies are under test or demonstration. The unlicensed bands are used for WiFi technology 802.11 in 5 MHz and 2.4 GHz bands across all test network sites for open source solutions. They are the most convenient way to demonstrate the data break-out at the edge of the network closest to the access point, demonstrating Multi-access edge computing (MEC) otherwise known as Mobile Edge Computing solutions. The test network is equipped by two different vendors for the WiFi access point and its control. Furthermore, the 60 GHz unlicensed band has been used as a wireless transport network alternative to the fibre network, using phased array antennas, creating many-to-many node connectivity as a mesh transport network. This solution has been deployed for the demonstration of use case in the Roman Baths as well as in the Millennium Square

for the smart city use-cases. Among the unlicensed access technologies, the test network also provides three indoor LiFi access points for technology demonstration at We-The-Curious as well as a couple of LiFi access points at the HPN for experimentation.

2) Optical Fibre Network

The heart of the UoB test network lies in the dark fibre connections across the city, providing a high performance and dynamic test-bed for the experimenters. The fibre layout of the UoB infrastructure spans across Bristol city centre, as shown in Fig. 2(a). The fibre links can be configured as a star connection with its centre at the Smart Internet Lab, or a mesh network connecting all the main nodes of the infrastructure. The dark fibre network is used for the fronthaul between the baseband units and the remote head radios for access points. It is also used as 10 Gbps L2 LAN connections between the sites, and as 1 Gbps links within the sites. The Smart internet Lab is also an endpoint of the INITIATE JANET/JISC link that terminates at the VIRTUS data centre hosting the 5GExchange. The link between the HPN and the satellite networks at the Roman Baths was leased as 10 Gbps from BT Openreach as a satellite test network. This fibre network is interconnected using a 10 Gb fibre link connection to the Slough data centre and other locations where projects demand connectivity as part of their use cases demonstration and experimentation.

3) Compute and Virtualization Solutions

There are two types of network virtualization solution implemented at the UoB testbed: open-source MANO (OSM) [29], and Nokia CloudBand and their Core network EPC along with NSA as a proprietary solution. Similarly for the compute capabilities, there are two solutions deployed at the UoB cloud and edge datacenters: Nokia MEC as proprietary and Openstack as the open-source solution. There are a number of solutions operating in the HPN cloud network to manage the network infrastructure, which include NETOS as SDN controller, a suite of solutions from Nokia: NETACT, FlexiZone controller, Cloudband, IP service router, vMEC, EPC core and EPC-NSA 5G core. The tenant research projects also bring their own platforms that are hosted on the HPN cloud network. For each project, this cloud network provides a determined VPN access to the project nodes only. The test-bed compute resources are further distributed in such that each node away from the HPN lab presents a fibre patch panel, a small switch connected to a small router and an edge computing resource as a MEC solution, and also if required a PoE+ to an access point. As a result of this, the test network provides a highly flexible cloud network slices for experimenters.

B. UNIVERSITY OF EDINBURGH TEST-BED

At the UoE, the LiFi R&D centre has a number of running test-beds that support various research activities to develop LiFi optical wireless communication systems, LiFi

attocellular networks and integration with next-generation RF wireless technologies, focusing currently on WiFi networks. A test-bed platform for a software-defined LiFi/WiFi hybrid network has been developed to facilitate experimental validation of the small cells networking algorithms on handover, tracking, localization, traffic offloading, network load balancing, security and energy efficiency, as shown in Fig. 4.



FIGURE 4. Experimental SDN-enabled LiFi/WiFi network test-bed, LiFi R&D Centre, UoE.

The UoE test-bed platform comprises of LiFi attocells and a WiFi AP, which are interconnected through an OF-enabled switch to a centralized SDN OpenDayLight (ODL) controller. This manages the data plane of the SDN-enabled LiFi/WiFi hybrid network through the southbound interface, while supporting applications via the northbound REST (Representational State Transfer) application program interface (API). The SDN controller has a number of software agents running on the APs. They pre-process the associated user generated traffic information that forms the state of their corresponding APs, and then send it periodically to the controller, as shown in Fig. 5. The SDN applications regularly receive the network state which they process to support intelligent services in the data plane. The software agents inherit from each other the information of some static parameters, with values that do not change its state over time, such as the type of AP (e.g. WiFi or LiFi), medium access control (MAC) and Internet protocol (IP) addresses. A group of software agents only process and then relay the global state of APs to the controller, while another group processes the instructions received from the controller to execute commands regarding the users' association with the APs and users' handover or traffic offloading, as shown in Fig. 5.

A LiFi access and traffic engineering (LATE) application has been developed to support the LiFi/WiFi hybrid network monitoring and management, user mobility and load balancing services. Applications require different information, which can be extracted from various network

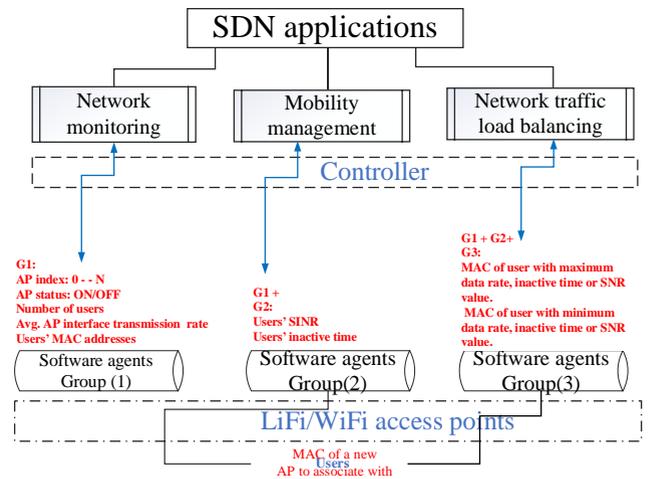


FIGURE 5. Software agent groups.

- show users' IP, MAC addresses, data rate and SNR value.
- identify mobility triggers such as users out of coverage, angle tilting or light blockage.
- show itinerary paths of users association to APs.
- associate users to APs based on load balancing policies.
- show network topology connectivity.
- show APs' interface utilization.
- show users distribution at APs and their MAC Addresses.
- control APs' ON/OFF status based on programmable parameters, such as number of users or traffic data rate.
- associate users to APs based on programmable parameters, such as SNR or data rate threshold.

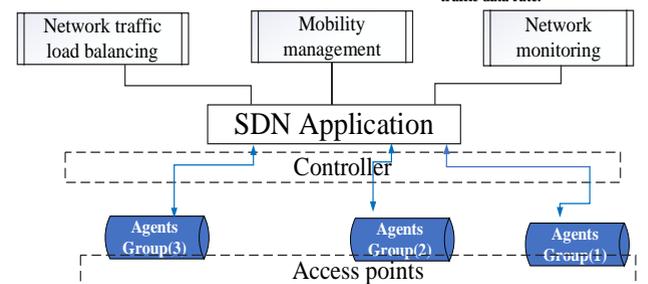


FIGURE 6. LiFi access & traffic engineering application architecture and graphical user interfaces.

layer parameters. These are processed by different software agents, as shown in Fig. 6. The LATE application supports three main services which have graphical user interfaces to help managers and administrators oversee the network state and measure the impact of network or service policies at the AP or network (SDN controller) level, as shown in Fig. 6. The software agent groups can be extended to further support SDN applications and deliver more services in the forwarding plane.

C. KING'S COLLEGE LONDON TEST-BED

As one of the INITIATE network islands, the test-bed of KCL is connected to the 5GUK exchange (5GUKEx) data centre in Slough via 10 Gbps fibre, as shown in Fig. 1. The local test-bed comprises (i) a virtualized and cloud system distributed in three physical location areas within the University's Strand campus, (ii) the 5G Tactile Internet Lab, where researchers have access to connected devices and test potential use cases and applications, (iii) the data

centre, where the main physical servers and the virtual baseband units of 5G base stations are located, (iv) the roof, where the RGE (relative gain enhancement) antennas are located, covering areas of Sommerset House and KCL's Strand campus courtyard. On the air interfaces, a diverse set of technologies and frequencies are supported, such as 5G, 4G and WiFi.

The KCL test-bed is fully run by software, offering a NFV orchestration of a wide range of VNFs of different compute requirements using OSM. All compute nodes are configured similarly with 128 GB of memory and two Intel E5-2699A CPUs of 44 cores each (88 virtual processors) clocked at 2.4 GHz. Furthermore, compute nodes have been configured to dedicate 4 cores (8 threads) to the host OS for hypervisor functions while 40 cores (80 threads) are reserved for virtual machines. The host OS reserves 8 GB of memory for its own processes. Network connectivity is provided by 10 Gb Ethernet for all performance-related functions of OpenStack, and by gigabit Ethernet interfaces for out-of-band management and SSH access to nodes.

Additionally, the test-bed provides Cloud-RAN capabilities for different functional splits of the RAN protocol stack with a packet fronthaul. This setup has been tested with both Ethernet and Optical fronthaul [30], while additional capabilities to support ultra-reliable, latency constrained communication are deployed and tested [31].

and a multi-Tbit network storage service. The cluster is interconnected using 10 and 40 GbE NICs with pass-through and Data Plane Development Kit (DPDK) capabilities, and a multi-vendor SDN network (NEC, Edge Core, Pica8, Corsa) with extensive metering and traffic prioritization capabilities. Test-bed users can access the DataPlane Broker (DPB) [32] network manager service to deploy point-to-point and multipoint overlay network slices with precise QoS control over this physical infrastructure. Furthermore, the Lancaster University test-bed offers access to the production SDN network within Infolab21, offering OpenFlow 1.3 and slicing support. Additionally, the test-bed provides P4 programmability through a range of software, FPGA, NPU and ASIC devices with P4 support.

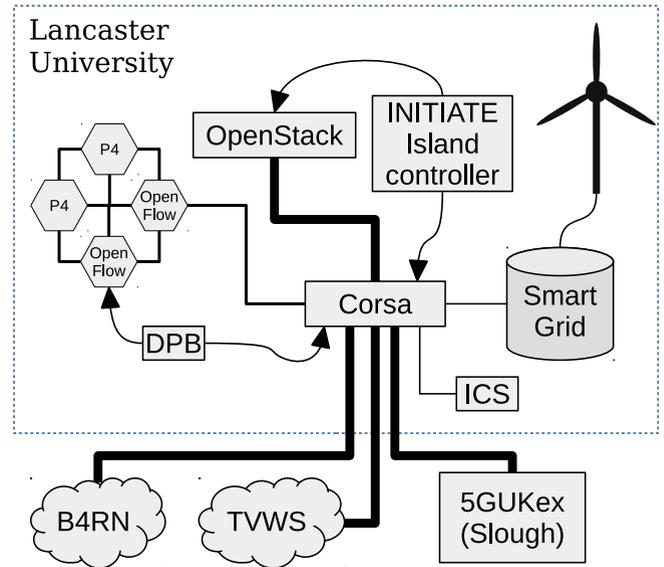


FIGURE 8. UoLan test-bed, with rural network access, renewable-energy monitoring and SDN experimentation.

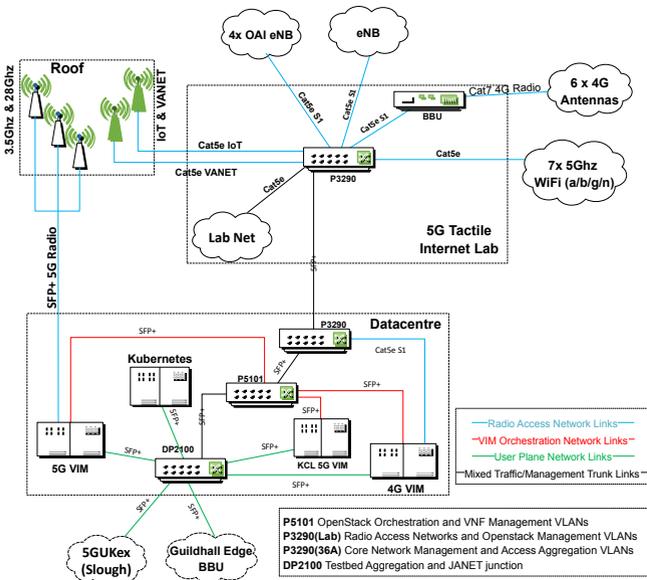


FIGURE 7. KCL's 5G test-bed, computation, communication and storage components.

D. LANCASTER UNIVERSITY TEST-BED

The Lancaster University INITIATE island connects the University test-beds to the INITIATE network through a 10 Gbps link, as shown in Fig. 8 and Fig. 1. The test-bed is designed to support extensive experimentation in NFV and network programmability, offering a large OSM/OpenStack cluster equipped with over 300 CPU cores, 8 TB of memory

The Lancaster island can also be extended to connect local external resources. Static VLANs can be set up in the core and exposed through OpenVPN, with access control delegated to an external Certificate Authority (CA) that can be managed by the party responsible for the resource. Custom NSDs can route the static VLANs to the Slough exchange, and therefore connect the local external resource to other islands.

The Lancaster University facility interconnects the INITIATE test-bed with a range of novel 5G application environments, including rural broadband, industrial control systems, and smart grid. It maintains a direct 10 GbE connection with B4RN (Broadband for the Rural North Ltd.), a community-based rural broadband ISP, providing gigabit broadband access to more than 5000 residences in rural areas of North West England. In parallel, Lancaster University hosts a novel TV White Space (TVWS) testbed combining communications infrastructure operating in the TV white space spectrum with distributed NFV compute capabilities at the network edge. The infrastructure allows

for experimentation and evaluation of TVWS as the basis for future 5G rural access networks.

Lancaster University also hosts an extensive Industrial Control System (ICS) test-bed. It is extensively used to conduct cyber-physical security. The ICS facility contains three network control systems: a three-stage off-the-shelf water treatment training rig from Gunt2, a model factory from Fishertechnik3 and a building management system (Trend IQ4e main controller and sub-field Trend IQ3 PLC). Finally, Lancaster University interconnects the Initiate test-bed with the EasyRES smart grid, a European experimental ICT infrastructure providing secure ancillary services to distributed renewable energy systems across Europe.

E. DIGITAL CATAPULT TEST-BED

The Digital Catapult 5G test-bed is a three-site facility, which is geographically distributed across Brighton and London. It is equipped with commercial and open source protocol stacks.

The three sites are interconnected with Gbps links. In addition, the London node is interconnected with the INITIATE test-bed through the 5GUKEx [11]. The main focus of the facility is to offer open access and technical support to third-party companies, primarily Small and Medium Enterprises (SMEs) that want to test and develop 5G-enabled services and applications through the 5G test-bed Accelerator Programme [33].

The three sites are similar both in terms of capabilities as well as setup, following the high-level architecture illustrated in Fig. 9. A range of commercial off-the-shelf (COTS) servers and switches, some of which are SDN enabled, provide the core infrastructure, on top of which a virtualization environment based on Openstack is deployed. Cloud-native applications are also supported through containers. The compute infrastructure offers a cumulative total of more than 1400 compute cores with several Gigabytes of RAM and Terabytes of storage on the premises, which can be exploited through concepts of Multi-Access Edge Compute (MEC). The infrastructure sits behind a firewall, providing a secure environment for the experimenters to evaluate their solutions. Commercial and open-source protocol stacks provide connectivity services over 5G (3GPP Rel. 15+), 4G, NB-IoT/LTE-M and WiFi. Similarly to the other INITIATE test-beds, OSM is deployed to manage and orchestrate services. DevOps principles, particularly for the deployment of the services using Ansible and Juju are being employed. Monitoring of both infrastructure and services is done through Prometheus, which is visualised in Grafana.

III. 5GUKEX ARCHITECTURE AND ORCHESTRATION FRAMEWORK

A network function (NF) is an infrastructure component that provides a well-defined functional behaviour, such as a media server, a firewall, or routing. It is a piece of software tightly coupled with specific, proprietary hardware, which needs to be manually installed into the network, creating

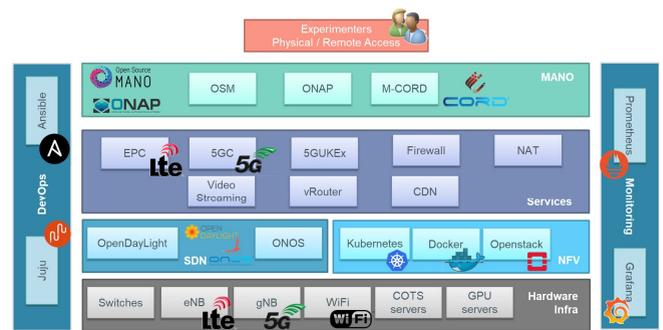


FIGURE 9. Digital Catapult High Level Architecture.

operational challenges and preventing rapid deployment of new network functions. However, a virtualized network function (VNF) implements the NF using software that is decoupled from the underlying, generic, hardware. This VNF can then be deployed on any INITIATE partner site to provide a specific service. A network service (NS) can be created by chaining and then deploying a set of VNFs in a specific order to deliver the intended service [34].

The 5GUKEx [11], [35] represents a central point for NFV orchestration in the INITIATE test network. It runs a multi-domain orchestrator (MDO) that orchestrates the deployed network services (NSes) in the different INITIATE network domains. As mentioned before, the 5GUKEx [35] connects five test-beds across the U.K. using the layer-2 JANET connectivity, as shown in Fig. 1. We consider that each test-bed runs on a separate island or site. The 5GUKEx architecture has a proxy that runs on each island, which maintains communications with a network service broker (NSB) running on the 5GUKEx. The NSB receives the information of islands and their supported NSs during the boot-up process, which represents the main point of interaction between the 5GUKEx and islands. This allows the experimenters, or other users, to compose the available NSes to create an inter-island NS (iNS) using the network service composer (NSC). The iNS is then deployed by using the NS manager (NSM) that handles its life cycle. The inter-domain connectivity manager (IDCM) creates appropriate network connections between the islands based on the received endpoint information from the islands' Proxies through the NSB.

The 5GUKEx is designed to support a scalable orchestration brokering architecture that aims to interconnect heterogeneous network test-beds running on different islands. It is connected with the local orchestrators running on the different islands, which enables experimenters to request services and resources by combining multiple island capabilities. The brokering functionality interacts with the relevant island orchestrators for managing, coordination,

instantiating or termination of the orchestrated network services. The 5GUKex has a unified information model that complies with the European Telecommunications Standards Institute (ETSI) NFV orchestrator standard [10]. This is one of the most widely adopted open-source standards for compute and network resource orchestration, which facilitates the rapid addition of new test-bed islands. It is used to communicate with the network islands for exposing the local test-bed capabilities, requesting experimental resources from other Islands, which also allocates the requested virtual network and computing resources during the orchestration process for the composed NSes. Experimenters can view the performance and status information of their running network services at the 5GUKex.

The 5GUKex can support other solutions for data path connectivity. For example, it can extend the MDO to support the data plane broker (DPB) which allows multi-site mesh topology to deploy NFVs/VNFs. The DPB [32] can be deployed as an IDCM to simultaneously establish layer-2 connections with guaranteed bandwidth between the islands to meet the request requirements of experimenters or users. Within the central switch, it manages a single virtual OpenFlow bridge and the bindings of its virtual ports to VLAN/physical-port tuples. Traffic-shaping is applied per binding to police the bandwidth used by each deployment, which is preceded by admission control to ensure that the total bandwidth allocated to the bindings on a port does not exceed its physical bandwidth. Each virtual port then corresponds to the endpoint of an exchange-orchestrated NS deployment at a given island; and each simultaneous deployment of NSes manifests as a discrete set of virtual ports. When a port set consists of only two elements (i.e. two islands NSs are connected in a single deployment), a pair of OpenFlow rules is deployed to exchange traffic between the two virtual ports. For larger sets (i.e., multi-island deployments), a learning switch is implemented between each set of virtual ports to enable traffic between independent deployments to remain functionally isolated, while traffic-shaping achieves non-functional isolation by bandwidth.

IV. USE CASES DEPLOYMENT AND RESULTS

INITIATE partners have interconnected their local test-beds through a test network which is managed by the 5GUKex. We report the results of five use-cases that show the performance of the INITIATE test network and the capabilities provided by the laboratories involved in these use-cases. The first two use-cases demonstrate the capability of supporting ultra-low latency (ULL) services through the INITIATE test network, focusing on 5G services orchestration that requires low-latency connectivity with guaranteed data rate. The third demonstrates the capability of building VNF-based wide LiFi attocellular networks that receive services from a cloud server and deliver it through the INITIATE network to the wireless users on the islands. It guarantees the required QoS and quality-of-experience (QoE) for wireless user devices and traffic flows. The fourth use case discusses cache load

balancing and a high-availability proxy that demonstrates the successful interaction of components across the INITIATE network. The fifth realises a healthcare scenario on provisioning ultra low latency telemedicine services through the INITIATE test network. The following section discusses in further details these use-cases.

A. ORCHESTRATING THE ORCHESTRA

The goal of this use-case was to create an experience where an orchestra is orchestrated by using the OSM across multiple network domains. The aim of the use-case was to allow musicians to compose music while being present at the different physical sites communicating over the low latency and high bandwidth network. The test-bed setup in

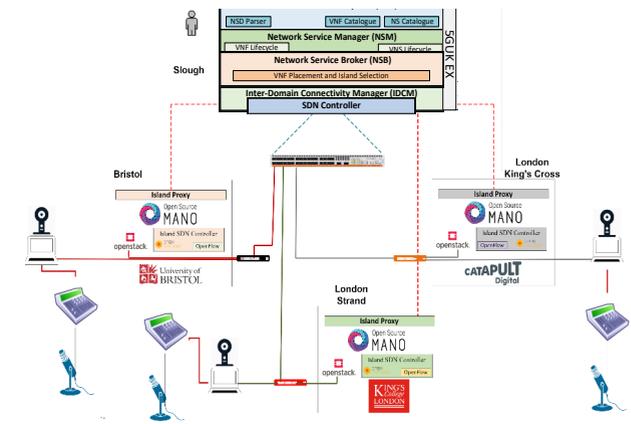


FIGURE 10. Orchestrating the Orchestra [36].

Fig. 10 shows the three sites: University of Bristol, Digital Catapult and King’s College London are connected using the 5GUKex hosting musicians and musical setup at each site. The round-trip network latency (without audio/video codec delays) was approximately 5ms whereas when codecs were included it was in the range of 25-30ms [36]

B. MUSIC FOR ALL - 5G MUSIC CLASS

Another use-case trial [37] was completed using the INITIATE test network serving the music community. This event was partnered with the music charity "Music for All"⁶ where the music teacher was located at King’s College London and instrumentalists and vocalists were distributed at Bristol and Birmingham. For this use-case, the INITIATE test network was, for the first time, connected to the BT-EE commercial 5G network from KCL to Birmingham as shown in Fig. 11. The major challenge associated with this use-case was to achieve the required latency of under 25ms across the two networks and three sites. Soundjack [38] was the audio mix software and UltraGrid was used to capture and multicast video across the locations. The authors in [37] have discussed the artistic and technological challenges addressed during this showcase.

⁶<https://musicforall.org.uk/>

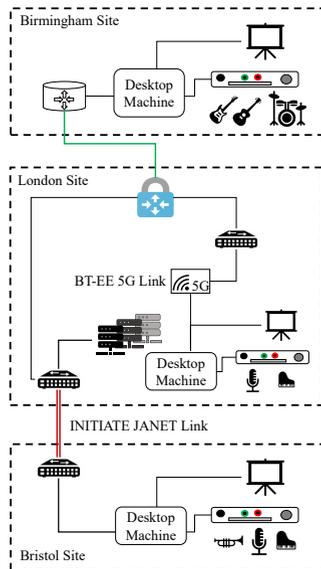


FIGURE 11. 5G Music class network setup.

Site 1	Site 2	Application Latency		Network Latency
		Min	Max	
Birmingham	Bristol	18 ms	20 ms	~6 ms
Bristol	London	17 ms	21 ms	~5 ms
London	Birmingham	16 ms	20 ms	~5.5 ms

TABLE 1. Latency Measurements for the 5G Music Class

The latency measurements between multiple sites connected in the use-case are shown in Table 1. All the measurements are average Round Trip Times (RTTs). The average network latency between all the sites ranged from 5 to 6ms, whereas the application processes added further latency but remained under 30ms. This use-case shows the versatility of the INITIATE platform as the Birmingham site was connected as the Ad-hoc node and an additional Infrastructure as a Service (IaaS) for this experiment.

C. CLOUD NETWORK-AS A SERVICE

One of the main challenges for the deployment of VNFs is the resource allocation required for the demanded NSs, particularly in wide area small cell networks. This use-case aims to inter-connect multiple LiFi attocellular network test-beds deployed on the different islands interconnected through the INITIATE test network. This should enable experimenters/users to access the UoE test-bed and receive services through this wide area LiFi attocellular networks in a reliable transparent manner. To achieve these goals, the UoE implemented a cloud infrastructure and network-as-a-service test-bed in the LiFi R&D centre to support the research activities relating to on-line services provisioning, communication systems development and integration with

other wireless technologies in INITIATE.

This use-case runs on the UoE test-bed that comprises the SDN-enabled LiFi/WiFi hybrid access network shown in Fig. 4, PowerEdge Server R440, OF-enabled HP Switch 3810 and other network components, as shown in Fig. 12. The Openstack Pike is installed as a common choice with other INITIATE colleagues. The server (controller) runs the OSM MANO and ODL in virtual machines that are connected to the switch HP 3810, as shown in Fig. 12. The SDN

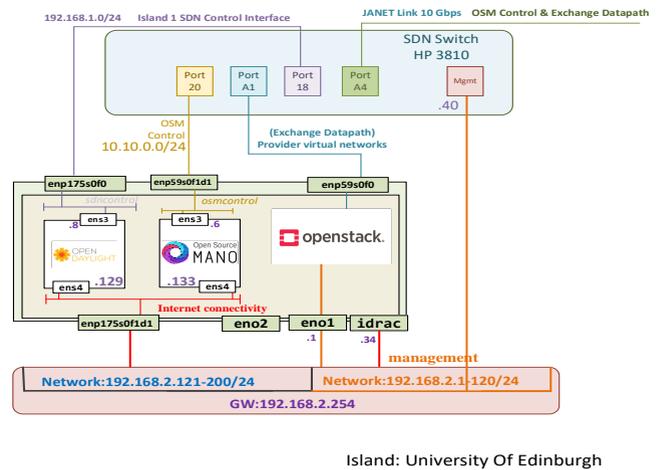


FIGURE 12. 10 Gbps JANET connectivity to UoE with 5GUKex.

open-source ODL Controller Boron version is configured in the test-bed. It assigns OF rules on the UoE switch and others along the paths established with our partners. The OF rules allow to handle and route appropriately traffic flows through the switches to reach their destinations. When a network service is created between two partners, it creates a network to which virtual machines are attached based on the VNF descriptors in the OSM MANO. They are allocated vCPUs, hard drive (HD) space and memory space, which form a slice of computing, storage, memory and network, as shown in Fig. 13 b.

The UoE vision aims to support e2e experimental services provisioning to our INITIATE partners, as shown in Fig. 13 a. For example, a local media server, which provides video contents to the user devices in the hybrid LiFi/WiFi network at the UoE, has been converted to a VNF running in the cloud. It is used to create a NS that enables the user devices in the LiFi attocellular network at the UoB to stream videos from the UoE VNF, as shown in Fig. 13 b. The inbound and outbound traffic between the UoE and UoB is routed according to the OF rules installed by the ODL controller.

The UoE vision is to establish multiple e2e network services, enabling a mesh NFV/VNF-based network that supports traffic flows routing among the different partners. When a network service is configured between the UoE and any partner in the INITIATE project, a virtual local area network (VLAN) number in the range, [3, 20], is assigned to the created network service, as shown in Fig. 13 a. A media

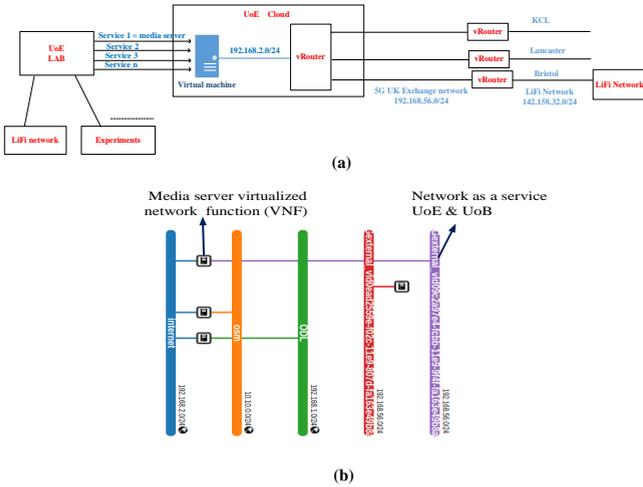


FIGURE 13. (a) UoE vision for e2e experimental services provisioning and inter-test-beds connectivity (b) Media server virtualized network function and network as a service between UoE and UoB.

server network function has been converted to a VNF which is deployed as a network service that provides multimedia traffic to the end-users associated with LiFi APs at the UoE and UoB, as shown in Fig. 13 b. The OF instance control plane, which runs on the VLAN 21 in the switch, sets the appropriate OF rules on the switches to run the deployed video server (video) streaming NS, as shown in Fig. 13 b.

Traffic measurements have been conducted to measure the throughput and latency of video stream packets transmitted between the UoE and UoB. A single LiFi user device associated with a LiFi AP configured in the high performance networks lab at UoB receives around 25 Mbps, as shown in Fig. 14 a. The video traffic packets experience a delay (latency) around 13.3 ms, as shown in Fig. 14 b. These results demonstrate that the 5GUKex can support

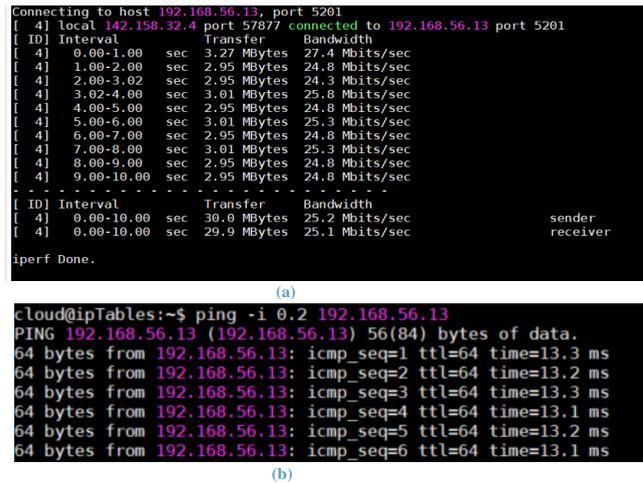


FIGURE 14. (a) iperf data rate received on the LiFi-xc dongle at the UoB (b) IP ping e2e delay (latency) UoE-UoB.

high throughput and real-time traffic transport between the different partners in this project. This is the first time two

LiFi attocellular networks have been connected through a high speed optical network. This enables experimenters to develop novel VNFs to provide new services to end-users or networking algorithms to further enhance the performance of wide LiFi attocellular networks.

D. HIGH-AVAILABILITY PROXY

This generic use case, developed by Lancaster University, demonstrates the basic interaction of components over the INITIATE test network. Several instances of an Apache web cache or server reside at one site, while a high-availability proxy (HAProxy) load balancer operates at the other, scanning for the cache instances on their shared L2 wide-area link. HTTP requests received by the HAProxy are distributed across the caches, and additional caches are automatically detected by the load balancer to deal with higher loads. A scenario of this use-case has been realized by deploying a single Apache server at one island and a HAProxy at another: see Fig. 15. The system was tested using an Apache Bench, with 1 GB RAM and one CPU; the results are illustrated in Table 2. A new VM is required per 10 clients approximately, when the CPU utilization approaches 100%.

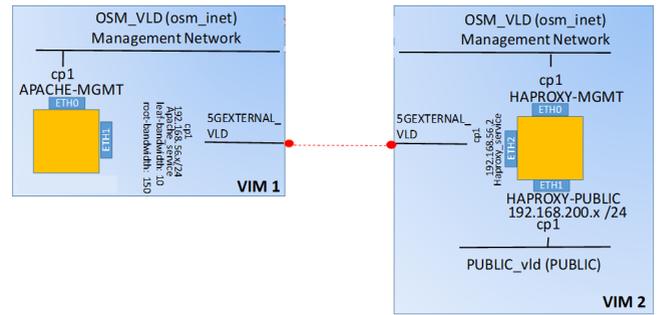


FIGURE 15. High-availability proxy use case.

Clients	Mean time/req (ms)	Max time/req (ms)	Apache %CPU
1	90.77	136	22
10	108.203	235	98

TABLE 2. HAProxy measurements

E. REMOTE HEALTHCARE AND TELEOPERATION

A use case on remote healthcare and ultra-reliable low-latency communication (URLLC) has been implemented by using the 5GUK infrastructure, which interconnects paramedics and ambulance staff attending patients with medical experts located in the hospital. A haptic communication system is deployed across the network to enable medical experts to guide the paramedic using haptic interfaces with kinesthetic and tactile feedback, as shown in Fig. 16. This use case is designed for ultrasound diagnosis in ambulance, in partnership with some industrial partners [39], which has been implemented and trialled by KCL in a

connected ambulance in the UK [40]. The performance of haptic communication system is affected in terms of QoE and task completion times, when latency exceeds 100 ms, due to the desynchronisation between video and haptic data streams [41].

This use case has been expanded in the INITIATE test-bed, which runs an experiment between three islands at KCL, DCAT offices and UoB using two Geomagic Touch devices and two video cameras. A haptic interface and a camera are installed at KCL, which are used by an operator representing the medical expert while the other haptic interface along with a camera are installed in the DCAT offices to act as a tele-operator used by the paramedic in an ambulance. This enables the medical expert to observe and guide the paramedic, and a medical specialist at the UoB to supervise the whole procedure. Despite the stringent URLLC requirements, the network is able to provide adequate QoS for the robotic controllers to operate in a stable state. The RTT latency between the DCAT offices and KCL is measured to be 4.5 ms (ICMP ping test) and the robotic controllers were tuned to keep the system stable under such conditions. Generally, bilateral teleoperation systems, as the one used in the aforementioned experiment, are able to compensate for the high amounts of delay in order to achieve stability but, as a trade-off, the quality of telepresence is reduced [42].

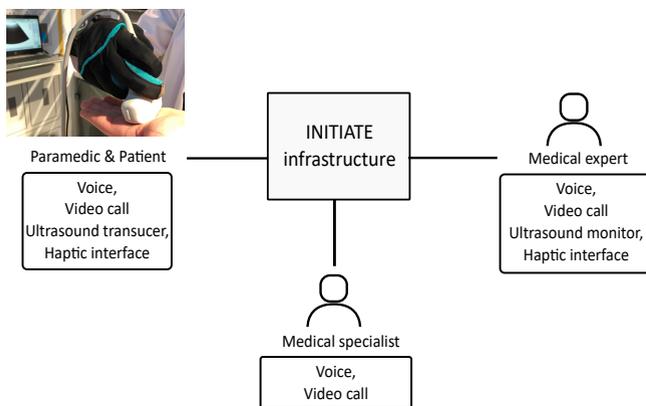


FIGURE 16. Remote healthcare use case.

V. CONCLUSION

This paper has explained the laboratory capabilities and test-bed architecture that each partner has contributed to build the INITIATE large federated experimental networking test-bed across the U.K. Concise details have been provided on the deployment of SDN, NFV orchestration and capabilities within each partner's test-bed and its interactions with the others through the 5GUKex [35]. This SDN exchange enables researchers to remotely request access to specific test-beds and carry out complex experiments involving any combination of their desired resources across any combination of the disparate test-beds. The INITIATE 5GUKex services provide a scalable plug-and-play

framework for connecting future test-beds and commercial networks, as well as inter-connection with other established test networks, such as NDFE and GEANT. A data plane routing mechanism was developed to support concurrent experimental access to the test-beds running on the different islands. The solution provided by the data plane broker is already integrated with the 5GUKex to simultaneously route traffic among the different sites and hence enable users to support simultaneous access to the multi-site test-beds. By making its test-bed accessible to 3rd parties, INITIATE provides an opportunity for a wide range of the UK ICT and digital economy academic communities, industry/small and medium-sized enterprises (SMEs) to enhance the current features of the INITIATE test-bed. Innovative SMEs are encouraged to explore the diverse capabilities for Internet research offered by the different test-beds available under the INITIATE 5GUKex. INITIATE provides experimenters with resources at each island to support real-time, low-latency, high-bandwidth, wide-area experiments at multiple sites with resource isolation.

As well as providing a distributed test-bed for SMEs and experimenters across the U.K., the platform is continuously evolving along with the individual test-beds. For instance, the adoption of new standards in ETSI NFV Release 3 into the 5GUKex is in progress and will help further integration of the various deployed NFV MANO systems including ONAP⁷, OpenBaton⁸, and OSM⁹.

REFERENCES

- [1] J. Gubbi, R. Buyya, S. Marusic, and M. Palaniswami, "Internet of Things (IoT): a vision, architectural elements, and future directions," *Future Generation Computer Systems*, vol. 29, no. 7, pp. 1645–1660, 2013.
- [2] S. Yan, Z. Gao, R. Wang, A. Mavromatis, R. Nejabati, and D. Simeonidou, "Dynamic abstraction of optical networks with machine learning technologies," in *Optical Network Design and Modeling*, A. Tzanakaki, M. Varvarigos, R. Muñoz, R. Nejabati, N. Yoshikane, M. Anastasopoulos, and J. Marquez-Barja, Eds. Springer International Publishing, 2020.
- [3] H. Haas, "High-speed wireless networking using visible light," *SPIE Newsroom*, April 2013.
- [4] H. Haas, L. Yin, C. Chen, S. Videv, D. Parol, E. Poves, H. Alshaer, and M. S. Islam, "Introduction to indoor networking concepts and challenges in LiFi," *Journal of Optical Communications and Networking*, vol. 12, no. 2, pp. A190–A203, January 2020.
- [5] R. Wang, R. S. Tessinari, E. Hugues-Salas, A. Bravalheri, N. Uniyal, A. S. Muqaddas, R. S. Guimaraes, T. Diallo, S. Moazzeni, Q. Wang, G. T. Kanellos, R. Nejabati, and D. Simeonidou, "End-to-end quantum secured inter-domain 5g service orchestration over dynamically switched flex-grid optical networks enabled by a q-roadm," *Journal of Lightwave Technology*, 2020.
- [6] J. Sterbenz, D. Hutchison, P. Müller, and C. Elliott, "Special issue on Future Internet Testbeds- Part I," *Computer Networks*, vol. 61, pp. 1–4, March 2014.
- [7] M. A. Lema, K. Antonakoglou, F. Sardis, N. Sornkarn, M. Condoluci, T. Mahmoodi, and M. Dohler, "5G case study of Internet of Skills: Slicing the human senses," in *2017 European Conference on Networks and Communications (EuCNC)*, 2017, pp. 1–6.
- [8] Y. Bi, M. Bunyakitanon, N. Uniyal, A. Bravalheri, A. Muqaddas, R. Nejabati, and D. Simeonidou, "Distributed online resource allocation using congestion game for 5g virtual network services," in *2019 IEEE Global Communications Conference (GLOBECOM)*, 2019.

⁷<https://www.onap.org/>

⁸<https://openbaton.github.io/>

⁹<https://osm.etsi.org/>

- [9] H. Alshaer and H. Haas, "Software-Defined Networking-Enabled Heterogeneous Wireless Networks and Applications Convergence," *IEEE Access*, vol. 8, pp. 66 672–66 692, April 2020.
- [10] ETSI, "ETSI, "Network Functions Virtualisation (NFV); Management and Orchestration" ETSI GS NFV-MAN 001 (V1.1.1)," Tech. Rep., 2014.
- [11] D. Gkounis, N. Uniyal, A. S. Muqaddas, R. Nejabati, and D. Simeonidou, "Demonstration of the 5GUK Exchange: A Lightweight Platform for Dynamic End-to-End Orchestration of Softwarized 5G Networks," in *European Conference on Optical Communication (ECOC)*, 2018.
- [12] C. J. Bernardos, B. P. Geró, M. Di Girolamo, A. Kern, B. Martini, and I. Vaishnavi, "5GEx: realising a Europe-wide multi-domain framework for software-defined infrastructures," *Transactions on Emerging Telecommunications Technologies*, 2016.
- [13] A. Francescon, G. Baggio, R. Fedrizzi, E. Orsini, and R. Riggio, "X-MANO: An open-source platform for cross-domain management and orchestration," in *2017 IEEE Conference on Network Softwarization (NetSoft)*, 2017, pp. 1–6.
- [14] NGMN Alliance, "NGMN 5G white paper," Tech. Rep., 2015.
- [15] NDFE, "EPSRC National Dark Fibre Facility," <http://www.ndff.ac.uk/>, Accessed: 29-08-2020.
- [16] GENI, "Global Environment for Network Innovations," <https://www.geni.net/>, Accessed: 29-08-2020.
- [17] G. Tselentis, J. Domingue, and A. G. et al., *Towards The Future Internet*. 1013 BG Amsterdam, Netherlands: IOS press, 2009, vol. 1.
- [18] M. Gupta, R. Legouable, M. M. Rosello, M. Cecchi, J. R. Alonso, M. Lorenzo, E. Kosmatos, M. R. Boldi, and G. Carrozzo, "The 5g eve end-to-end 5g facility for extensive trials," in *2019 IEEE International Conference on Communications Workshops (ICC Workshops)*, May 2019, pp. 1–5.
- [19] H2020-ICT-2017, "5GENESIS: 5th Generation End-to-end Network, Experimentation, System Integration, and Showcasing," www.5GENESIS.eu, June 2018. [online]. <https://5g-ppp.eu/5genesis/>.
- [20] 5GENESIS Consortium, "Deliverable D3.1, Management and Orchestration (Release A) ," https://5genesis.eu/wp-content/uploads/2019/10/5GENESIS_D3.1_v1.0.pdf, Accessed: 27-08-2020.
- [21] K. Mahmood, P. Grønsvund, A. Gavras, M. B. Weiss, D. Warren, C. Trnoris, A. F. Cattoni, and P. Muschamp, "Design of 5G End-to-End Facility for Performance Evaluation and Use Case Trials," in *IEEE 2nd 5G World Forum (5GWF)*, Sep. 2019, pp. 341–346.
- [22] 5G-VINNI, "Onboarding Vertical Applications On 5G-VINNI Facility," *White papers 5G PPP*: <https://www.5g-vinni.eu/>, vol. 1.0, pp. 1–26, January 2020.
- [23] N. McKeown, T. Anderson, H. Balakrishnan, G. Parulker et al., "OpenFlow: Enabling Innovation in Campus Networks," *ACM Computer Communication Review*, vol. 38, no. 2, pp. 69–74, April 2008.
- [24] R. Mijumbi, J. Serrat, J. L. Gorricho et al., "Network function virtualization: State-of-the-art and research challenges," *IEEE Communications Surveys and Tutorials*, vol. 18, no. 1, p. 236?262, May-June 2016.
- [25] Jisc, "JANET National Research and Education Network," <https://www.jisc.ac.uk/janet>, Accessed: 28-08-2018.
- [26] INITIATE Consortium, "INITIATE Project," <http://www.initiate.ac.uk>, Accessed: 28-08-2020.
- [27] GEANT, "The GEANT Project," <https://www.geant.org/>, Accessed: 28-08-2020.
- [28] Department of Digital, Culture, Media & Sport, United Kingdom, "5G Testbeds & Trials Programme," <https://uk5g.org/discover/testbeds-and-trials/>, Accessed: 28-08-2018.
- [29] ETSI OSM, "OSM," <https://osm.etsi.org>, Accessed: 01-10-2018.
- [30] G. Mountaser, M. Condoluci, T. Mahmoodi, M. Dohler, and I. Mings, "Cloud-RAN in Support of URLLC," in *2017 IEEE GC Wkshps*, December 2017.
- [31] G. Mountaser, T. Mahmoodi, and O. Simeone, "Reliable and Low-Latency Fronthaul for Tactile Internet Applications," *IEEE JSAC*, vol. 36, no. 11, pp. 2455–2463, Nov 2018.
- [32] S. Simpson, A. Farshad, P. McCherry, A. Magzoub, W. Fantom, C. Rotsos, N. Race, and D. Hutchison, "DataPlane Broker: Open WAN control for multi-site service orchestration," in *2019 IEEE Conference on Network Function Virtualization and Software Defined Networks (NFV-SDN)*. IEEE, 8 2019.
- [33] Digital Catapult, "5G Testbed Accelerator Programme," <https://www.digicatatapult.org.uk/projects/5g-testbed-accelerator-programme/>, Accessed: 28-08-2020.
- [34] M. F. Bari, S. R. Chowdhury, R. Ahmed, and R. Boutaba, "On orchestrating virtual network functions," in *Proc. of the 11th Conf. Network and Service Management (CNSM)*, Barcelona, Spain, November 2015, pp. 50–56.
- [35] N. Uniyal, A. S. Muqaddas, D. Gkounis, A. Bravalheri, S. Moazzeni, F. Sardis, M. Dohler, R. Nejabati, and D. Simeonidou, "5guk exchange: Towards sustainable end-to-end multi-domain orchestration of softwarized 5g networks," *Computer Networks*, 2020.
- [36] M. Shakir, F. Sardis, N. Uniyal, D. Gkounis, A. Carot, M. Dohler, D. Simeonidou, and D. Kaleshi, "5GUK Trials: Distributing a Live Orchestra over 5G Architecture & Federated Resource Control," *Global Communications*, 2019, January 2019. [Online]. Available: <https://www.comsoc.org/publications/ctn/5guk-trials-distributing-live-orchestra-over-5g>
- [37] A. Carôt, F. Sardis, M. Dohler, S. Saunders, N. Uniyal, and R. Cornock, "Creation of a hyper-realistic remote music session with professional musicians and public audiences using 5g commodity hardware," in *2020 IEEE International Conference on Multimedia Expo Workshops (ICMEW)*, 2020.
- [38] A. Carot, "Soundjack website," <http://www.soundjack.eu>, Accessed: 28-08-2020.
- [39] Ericsson, "Real-time interaction in 5G- A use case example from the health care industry," <https://www.ericsson.com/assets/local/digital-services/doc/health-care-case-real-time-interaction-in-5g-with-ims-data-channel.pdf>, Accessed: 28-08-2020.
- [40] 5GUK, "5G ultrasound in a Connected Ambulance demo," <https://uk5g.org/attend/5g-ultrasound-connected-ambulance-demo/>, Accessed: 28-08-2020.
- [41] A. Kumcu, L. Vermeulen, S. A. Elprama, P. Duysburgh et al., "Effect of video lag on laparoscopic surgery: correlation between performance and usability at low latencies," *The International Journal of Medical Robotics and Computer Assisted Surgery*, vol. 13, no. 2, pp. 1–10, 2017.
- [42] K. Antonakoglou, X. Xu, E. Steinbach, T. Mahmoodi, and M. Dohler, "Toward haptic communications over the 5G Tactile Internet," *IEEE Communications Surveys Tutorials*, vol. 20, no. 4, pp. 3034–3059, 2018.



HAMADA ALSHAER (M'2001-SM'2012) received the Ph.D. degree in computer engineering and telecommunications from Pierre et Marie Curie University, France, in 2005. He is currently involved in software defined wireless networking, security, and mobile networks virtualization research development with the LiFi R&D centre, School of Engineering, The University of Edinburgh, U.K. He has researched for over 18 years with British Telecom, Etisalat, INRIA, France, and Leeds University, in academic and industrial research development.



NAVDEEP UNIYAL is a Senior Research Associate at the High Performance Networks Research Group, Smart Internet Lab at University of Bristol. Previously, he worked at the NEC Laboratories Europe, Germany in the Network Research Division where he focused on Information Centric Networks (ICN), NFV Orchestration and Network Microservices. He received his M.Sc. degree in Distributed Software Systems from Technical University of Darmstadt, Germany in 2015. His research interests lie in the areas of Cloud computing, NFV, SDN, NFV-MANO, Machine Learning and their applications towards 5G Networks.



peer-reviewed technical articles and conference papers.

KONSTANTINOS KATSAROS (M'2010) received his M.Sc. and Ph.D. in Electronic Engineering from University of Surrey in 2010 and 2014. He is currently a Senior 5G Technologist at Digital Catapult, UK. He provides oversight and guidance for specific 5G system architecture and subsystem implementations, focusing on multi-access edge computing (MEC) and orchestration. He has participated in several European and national projects and has co-authored more than 25



ation of new business opportunities through niche communication services, network measurements and monitoring and its management. Among his achievements are many international patents within the telecommunication industry as well as leading several technical activities towards public engagement and delivery of 5G show cases through Digital Catapult and University of Bristol.

HAMID FALAKI is a telecommunications consultant at the Smart Internet Lab, providing technical services for coordination, delivery, operation, maintenance and expansion of the 5GUK Test Network at University of Bristol. This service provides a test network as an experimentation facility for research projects under Smart Internet Lab. He has 20+ years' experience in the telecoms technology sector, and prior to that 10+ years from the energy sector. His Current interest is creation



over networks, mobile cloud computing and edge-assisted AI systems.

KONSTANTINOS ANTONAKOGLU received the M.Sc. degree in Control and Computing from the National and Kapodistrian University of Athens in 2014 and the Ph.D. degree in Telecommunications from King's College London in 2020. He is currently a Research Associate at King's College London involved in the EU-Korea collaboration project PriMO-5G and the EPSRC-funded project INITIATE. His research interests include haptic communication systems



PAUL MCCHERY has a B.Sc(Hons) in Network Engineering, an M.Sc in Cyber Security and is currently studying a Ph.D in Communications at Lancaster University. His Ph.D is focused on Protecting the Internet Border Gateway Protocol Routing Infrastructure through Multi-Layer Situational Awareness.



STEVEN SIMPSON is a Senior Research Associate at SCC, with diverse interests across networking, including multimedia, multicast and group communication, overlays, resilience and security, NFV and SDN, and with diverse experience with many EU, EPSRC and other research projects in these fields. His current focus is on network slicing and multi-tenancy for 5G communications.



cloud OS (Mirage Unikernel).

CHARALAMPOS ROTSOs is a Lecturer in Computer Networks and Networked Systems at Lancaster University. He holds a Ph.D. from the Computer Laboratory, Cambridge University. His research focus is in network service management and orchestration, network programmability and monitoring and cloud operating systems. He is an active contributor to many popular open-source projects relevant to SDN experimentation (OFLOPS), open-hardware (Blueswitch) and



of LiFi systems. Her current research focuses on developing enabling techniques to enhance the performance, reliability and security of LiFi systems.

HANAA ABUMARSHOUD is currently employed as a Postdoctoral Research Associate at the LiFi R&D Centre, School of Engineering, The University of Edinburgh, U.K. She was awarded her M.Sc. and Ph.D. in Electrical and Computer Engineering in 2013 and 2017 from Khalifa University, UAE. Her main expertise is the application of information theory and signal processing techniques in optical wireless communications, particularly visible light communications



from 2006 to 2009. She has also worked in mobile and personal communications industry from 2002 to 2006, and in an R&D team on developing DECT standard for WLL applications. She has contributed to, and led number of FP7, H2020 and EPSRC funded projects, advancing mobile and wireless communication networks. Toktam is currently Head of the Centre for Telecommunications Research at the Department of Informatics, King's College London. Her research interests include 5G communications, network virtualization, and low latency networking.

TOKTAM MAHMOODI received the B.Sc. degree in electrical engineering from the Sharif University of Technology, Iran, and the Ph.D. degree in telecommunications from King's College London, U.K. She was a Visiting Research Scientist with F5 Networks, San Jose, CA, in 2013, a Post-Doctoral Research Associate with the ISN Research Group, Electrical and Electronic Engineering Department, Imperial College from 2010 to 2011, and a Mobile VCE Researcher



REZA NEJABATI is currently a full professor and head of High Performance Network Group in the Department of Electrical and Electronic Engineering in University of Bristol. He has established successful and internationally recognized research activities in University of Bristol on “Software Defined Network”, “Network Virtualisation” and “Quantum Secured Networking”. Under his leadership, these research activities have been transformational and have done major contributions in open, programmable and quantum secured Telecom Infrastructure. His research received the prestigious IEEE Charles Kao Award 2016. Building on his research portfolio over the last 3 years, he co-founded a successful start-up company (Zeetta Networks Ltd).



DRITAN KALESHI is Head of Technology - 5G at Digital Catapult. He has 25 years experience as a researcher and technologist in communication networks, distributed systems and IoT interoperability. Prior to this he was with University of Bristol, where he led a 15-strong research team, strategically combining research with industrial collaboration, making a wide range of contributions and practical implementations in networking, interoperability, smart energy, cities and digital health, including large scale testbeds and trials. Dritan has published over 75 papers, holds three patents and has edited two international standards on interoperability, and is often invited to speak on advanced digital infrastructure. He has represented the UK in international standardization bodies and served on/chaired international conferences and technical committees.



DAVID HUTCHISON is Professor of Computing at Lancaster University and founding Director of InfoLab21. He has served on the TPC of top conferences, such as ACM SIGCOMM, IEEE Infocom; he served on editorial boards of Springer Verlag’s Lecture Notes in Computer Science, the Computer Networks Journal, and IEEE TNSM, and was editor of the Wiley book series in Computer Networks and Distributed Systems. He has helped build a strong research group in computer networks, which is well known internationally for contributions in a range of areas including quality of service architecture and mechanisms, active and programmable networking, multimedia systems, content distribution networks, networking testbeds, and Internet science. He is currently focusing on resilient and secure networking, with interests in future Internet and also the protection of critical infrastructures, including industrial control systems.



HARALD HAAS (S’98-AM’00-M’03-SM’16-F’17) received the Ph.D. degree from The University of Edinburgh in 2001. He is currently the Professor of Mobile Communications at The University of Edinburgh and the Director of the LiFi Research and Development Centre. Haas is the Initiator, co-founder and Chief Scientific Officer of pureLiFi Ltd.. He has authored 500 conference and journal papers, including papers in Science and Nature Communications. Haas’ main research interests are in optical wireless communications, hybrid optical wireless and RF communications, spatial modulation, and interference coordination in wireless networks. His team invented spatial modulation. He introduced LiFi to the public at an invited TED Global talk in 2011. This talk on Wireless Data from Every Light Bulb has been watched online over 2.72 million times. LiFi was listed among the 50 best inventions in TIME Magazine in 2011. He gave a second TED Global lecture in 2015 on the use of solar cells as LiFi data detectors and energy harvesters. This has been viewed online over 2.75 million times. In 2016, he received the Outstanding Achievement Award from the International Solid State Lighting Alliance. In 2019 he was recipient of IEEE Vehicular Society James Evans Avant Garde Award. Haas was elected a Fellow of the Royal Society of Edinburgh (RSE) in 2017. In the same year he received a Royal Society Wolfson Research Merit Award and was elevated to IEEE Fellow. In 2018 he received a three-year EPSRC Established Career Fellowship extension and was elected Fellow of the IET. Haas was elected Fellow of the Royal Academy of Engineering (FREng) in 2019.



DIMITRA SIMEONIDOU is a Full Professor at the University of Bristol, the Co-Director of the Bristol Digital Futures Institute and the Director of Smart Internet Lab. Her research is focusing in the fields of high performance networks, programmable networks, wireless-optical convergence, 5G/B5G and smart city infrastructures. She is increasingly working with Social Sciences on topics of digital transformation for society and businesses. Dimitra has been the Technical Architect and the CTO of the smart city project Bristol Is Open. She is currently leading the Bristol City/Region 5G urban pilots. She is the author and co-author of over 600 publications, numerous patents and several major contributions to standards. She has been co-founder of two spin-out companies, the latest being the University of Bristol VC funded spin-out Zeetta Networks, <http://www.zeetta.com>, delivering SDN solutions for enterprise and emergency networks. Dimitra is a Fellow of the Royal Academy of Engineering, a Fellow of the IEEE and a Royal Society Wolfson Scholar.

...