

Douglas Booker¹, Nick Molden²

NAQTS Ltd.¹ | Emissions Analytics Ltd.² | Lancaster University, UK¹

INTRODUCTION


Many studies have addressed Ambient Air Pollution (AAP) that arises from traffic, and its associated negative impacts on public health. However, less has been done to understand Indoor Air Quality (IAQ) despite the average person now spending more than 90% of their time indoors (Klepeis et al. 2001). Around one hour of this indoor exposure is spent inside vehicles (Müller et al. 2011), and is referred to as Vehicle Interior Air Quality (VIAQ). This exposure is important to understand given the immediate proximity to significant pollutant sources (other vehicles), plus, in urban areas, high AAP concentrations compared to other micro-environments.

AIMS & OBJECTIVES

To address this knowledge gap, two NAQTS V1000 Integrated Air Quality Monitors were used to simultaneously monitor inside-outside four vehicles for Particle Number (PN) and Carbon Dioxide (CO₂). The vehicles were analysed to understand *Ingress Ratio* (how much ambient PN is getting into the vehicle cabin) and *Stiffness* (how well the vehicle is ventilating CO₂).

TECHNOLOGY & METROLOGY


- PN:** CPC with 50:1 pre-dilution.
- CO, NO₂, VOCs:** Metal Oxide & Electrochemical
- VOCs - 4 event-driven thermal desorption tubes**
- CO₂:** NDIR
- T, P, RH:** BME280
- Noise:** dBA
- Location:** GPS
- Vibration:** 3D-accelerometer & -gyro
- Data Storage:** SQL database
- GUI:** WIFI HTML interface

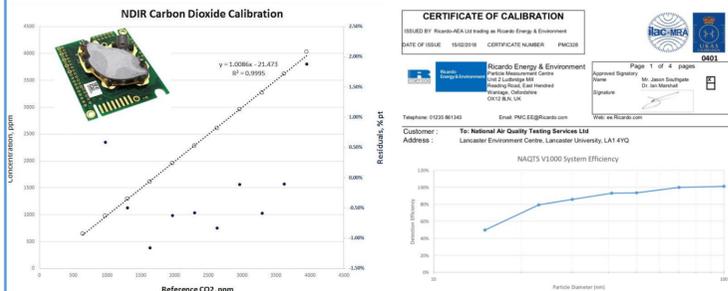

EXPERIMENTAL SET UP



ON ROAD TESTING

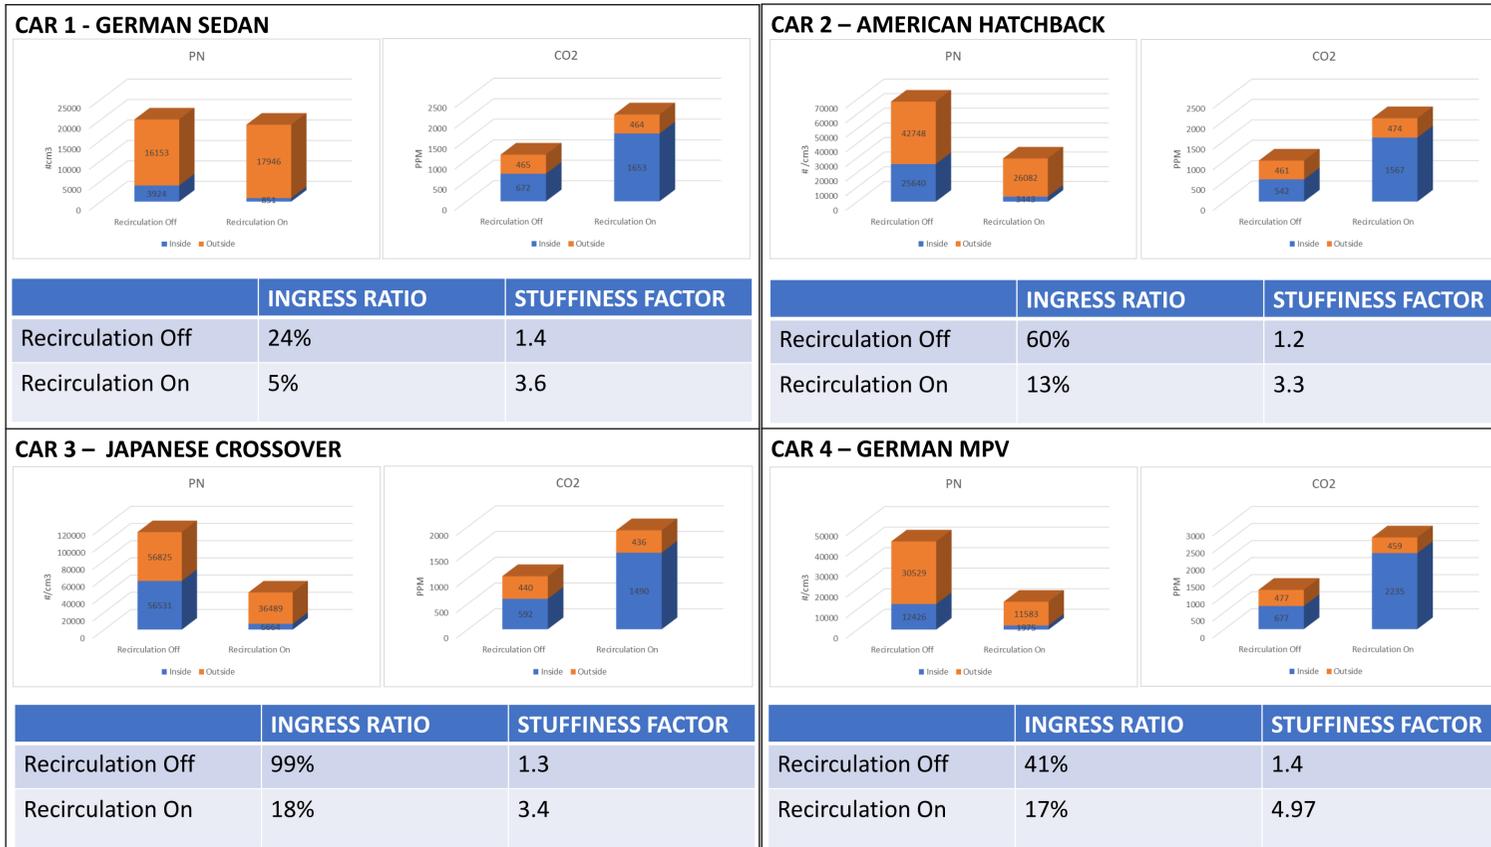

CONCLUSION

The data from these four vehicles shows the heterogeneity of Ingress Ratios (ranging from 24% to 99% with recirculation mode off, and 5-17% with recirculation mode on) and Stiffness Factors (1.2 – 1.4 with recirculation mode off, and 3.3 – 4.97 with recirculation mode on) across different manufacturers and vehicle types.


The results raise an inherent tradeoff between protecting passengers from ambient PN ingress, and adequate ventilation to prevent Stiffness. This demonstrates the huge influence of passenger habit on dose of CO₂ and PN. By driver education, and/or automation of HVAC controls, exposure to PN can be reduced significantly.

FUTURE RESEARCH POTENTIAL

This study represents a small data set, however, Emissions Analytics are using NAQTS' air quality monitoring technology to gather data on Ingress & Stiffness for 100s of vehicles per year. Moreover, this will be extended to include other pollutants (NO₂, CO, VOCs).

This analysis of the dynamics between indoor-outdoor will be supplemented with full VOC speciation using TD GC-MS to characterize both the "new car smell" as well as dynamic VOCs.

The combination of these measurements will give a holistic, "real-world" understanding of VIAQ, for the consumer, regulators, and industry.

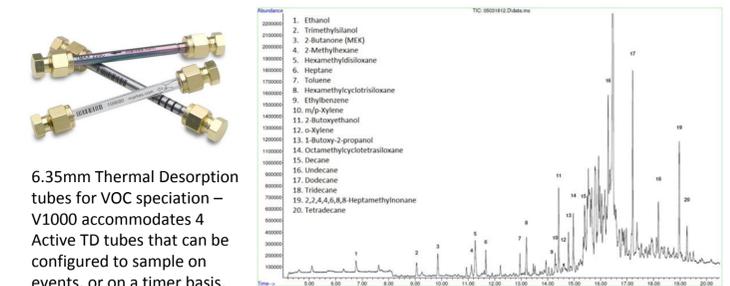

REFERENCES

D. Müller, D. Klingelhöfer, S. Uibel and D.A. Groneberg. Car indoor air pollution - analysis of potential sources. *Journal of Occupational Medicine and Toxicology* 6, no. 33 (2011): 1-7.

Klepeis, N. E. et al. The National Human Activity Pattern Survey (NHAPS): a resource for assessing exposure to environmental pollutants. *J. Expo. Anal. Environ. Epidemiol.* 11, 231–252 (2001).

CONTACT

Douglas Booker, CEO
dbooker@naqts.com
National Air Quality Testing Services Ltd. (NAQTS)
www.naqts.com
@NAQTS